

May 15, 2003

Fluid Minerals Group
Bureau of Land Management
Vernal Field Office
170 South 500 East
Vernal, Utah 84078

RE: Application for Permit to Drill—Dominion Exploration & Production, Inc.
WHB 6-26E, 1,730' FNL, 2,055' FWL, SE/4 NW/4
Section 26, T10S, R19E, SLB&M, Uintah County, Utah

Dear Fluid Minerals Group:

On behalf of Dominion Exploration & Production, Inc. (Dominion), Buys & Associates, Inc. respectfully submits the enclosed original and two copies of the *Application for Permit to Drill (APD)* for the above referenced well. Included with the APD is the following supplemental information:

Exhibit "A" - Survey plats, layouts and photos of the proposed well site;

Exhibit "B" - Proposed location maps with access and utility corridors;

Exhibit "C" - Production site layout;

Exhibit "D" - Drilling Plan;

Exhibit "E" - Surface Use Plan;

Exhibit "F" - Typical BOP and Choke Manifold diagram.

Please accept this letter as Dominion's, written request for confidential treatment of all information contained in and pertaining to this application.

Thank you very much for your timely consideration of this application. Please feel free to contact myself or Carla Christian of Dominion at 405-749-5263 if you have any questions or need additional information.

Sincerely,

Don Hamilton

Don Hamilton
Agent for Dominion

cc: Diana Mason, Division of Oil, Gas and Mining
Carla Christian, Dominion
Marty Buys, Buys & Associates, Inc.

RECEIVED

MAY 23 2003

DIV. OF OIL, GAS & MINING

FILE COPY

CONFIDENTIAL

001

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒DEEPEN ☐

b. TYPE OF WELL

OIL
WELL ☐GAS
WELL ☒

OTHER

SINGLE
ZONE ☒MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

Dominion Exploration & Production, Inc.

3. ADDRESS AND TELEPHONE NO.

14000 Quail Springs Parkway, Suite 600, Oklahoma City, OK 73134, 405-749-6690

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*

At surface

1,730' FNL, 2,055' FWL

SE/4 NW/4

At proposed prod. zone

1,730' FNL, 2,055' FWL

SE/4 NW/4

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

12.22 miles southwest of Ouray, Utah

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drig. unit line, if any)

937'

16. NO. OF ACRES IN LEASE

600

17. NO. OF ACRES ASSIGNED
TO THIS WELL

40 acres

18. DISTANCE FROM PROPOSED
LOCATION TO NEAREST WELL,
DRILLING, COMPLETED, OR
APPLIED FOR, ON THIS LEASE, FT.

1,205'

19. PROPOSED DEPTH

8,000'

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

5,157' GR

22. APPROX. DATE WORK WILL START*

December 15, 2003

23.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
17-1/2"	13-3/8" H-40 ST&C	48#	500'	450 sacks Class G cement + 2% CaCl ₂ + 1/4 #/sk. Poly-E-Flakes
12-1/4"	8-5/8" J-55 LT&C	32#	2,200'	385 sacks Lead and 370 sacks Tail (see Drilling Plan)
7-7/8"	5-1/2" Mav-80 LT&C	17#	8,000'	160 sacks Lead and 435 sacks Tail (see Drilling Plan)

Bond Information:

Bond coverage is provided by Travelers Casualty and Surety Company of America, Bond #76S 63050 0330

Other Information:

Drilling Plan and Surface Use Plan are attached.

Dominion requests that this complete application for permit to drill be held confidential.

A request for exception to spacing (R649-3-21) is hereby requested based on topography since the well is located within 460' of the drilling unit boundary. Dominion Exploration & Production, Inc. is the only owner and operator within 460' of the proposed well.

Federal Approval of this
Action is Necessary

RECEIVED

MAY 23 2003

CONFIDENTIAL

DIV. OF OIL, GAS & MINING

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED Don Hamilton Don Hamilton TITLE Agent for Dominion

DATE May 15, 2003

(This space for Federal or State office use)

PERMIT NO. 43-047-34985 APPROVAL DATEApplication approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:APPROVED BY Bradley G. Hill TITLE ENVIRONMENTAL SCIENTIST IIIDATE 05-28-03

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency or the

T10S, R19E, S.L.B.&M.

DOMINION EXPLR. & PROD., INC.



Well location, WHB #6-26E, located as shown in the SE 1/4 NW 1/4 of Section 26, T10S, R19E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

SPOT ELEVATION AT THE NORTHWEST CORNER OF SECTION 29, T10S, R20E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. NW QUADRANGLE, UTAH, UTAH COUNTY 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5251 FEET.


BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

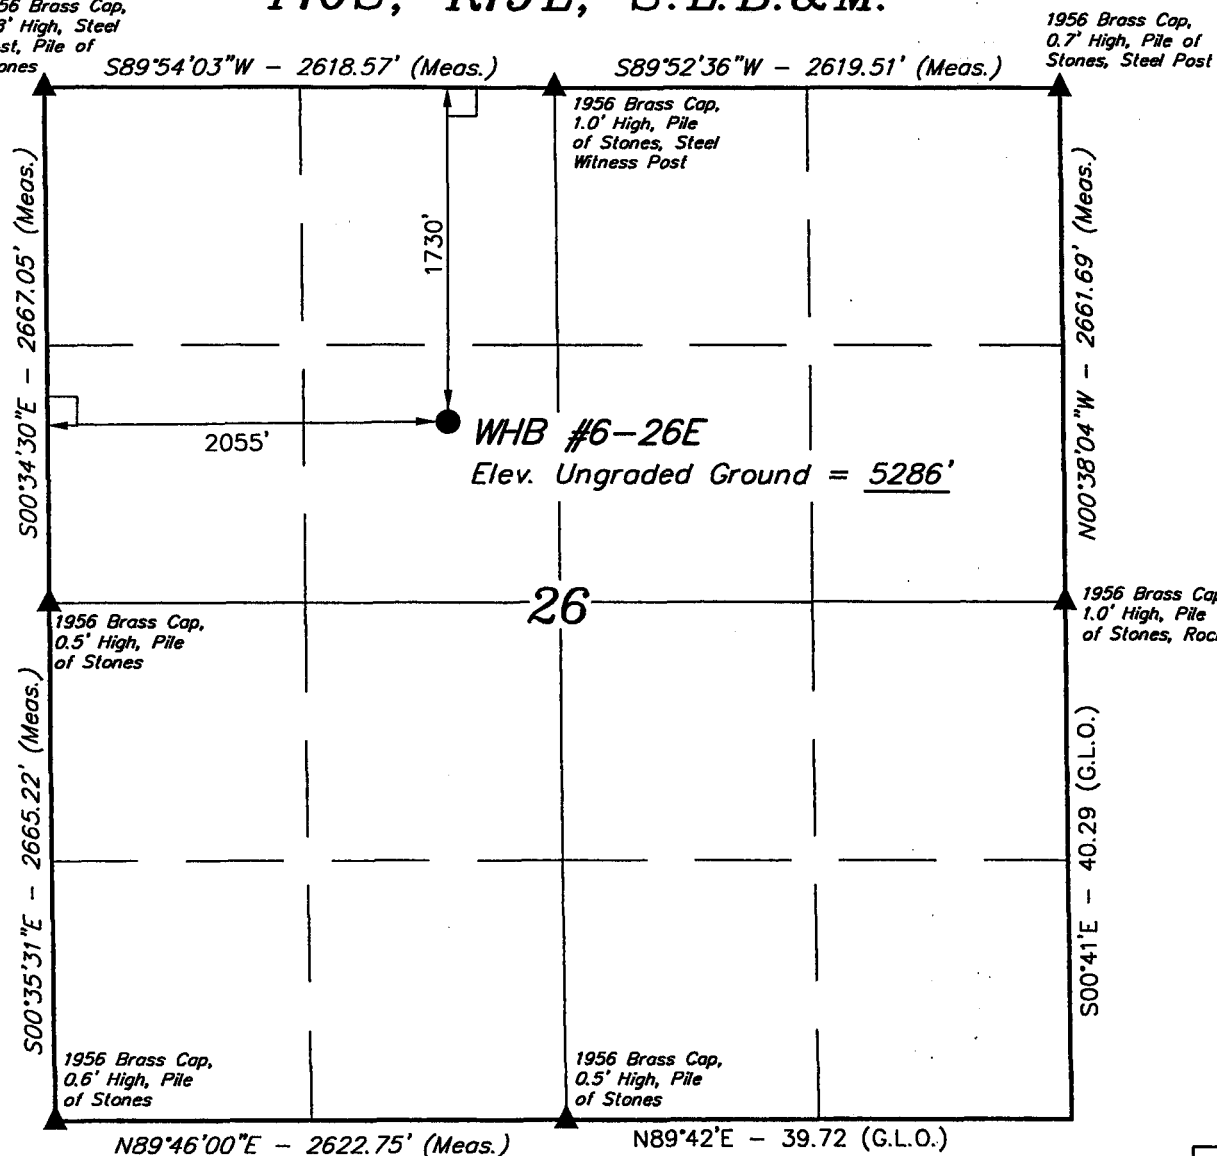

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

RECEIVED

MAY 23 2003

LEGEND:

- = 90° SYMBOL
- = PROPOSED WELL HEAD.
- = SECTION CORNERS LOCATED.
- DIV. OF OIL, GAS & MINING (NAD 83)
- LATITUDE = 39°55'14.67" (39.920742)
- LONGITUDE = 109°45'05.39" (109.751497)

SCALE 1" = 1000'	DATE SURVEYED: 5-1-03	DATE DRAWN: 5-2-03
PARTY K.K. M.B. C.G.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE DOMINION EXPLR. & PROD., INC.	

DRILLING PLAN

APPROVAL OF OPERATIONS

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: WHB 6-26E
1730' FNL & 2055' FWL
Section 26-10S-19E
Uintah County, UT

1. GEOLOGIC SURFACE FORMATION Uintah

2. ESTIMATED DEPTHS OF IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Green River	1,096'
Wasatch Tongue	4,006'
Uteland Limestone	4,336'
Wasatch	4,496'
Chapita Wells	5,396'
Uteland Buttes	6,596'
Mesaverde	7,696'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth</u>	<u>Type</u>
Green River	1,096'	Oil
Wasatch Tongue	4,006'	Oil
Uteland Limestone	4,336'	Oil
Wasatch	4,496'	Gas
Chapita Wells	5,396'	Gas
Uteland Buttes	6,596'	Gas
Mesaverde	7,696'	Gas

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.

<u>Type</u>	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Conn.</u>	<u>Top</u>	<u>Bottom</u>	<u>Hole</u>
Surface	13-3/8"	48.0 ppf	H-40	STC	0'	500'	17-1/2"
Intermediate	8-5/8"	32.0 ppf	J-55	LTC	0'	2,200'	12-1/4"
Production	5-1/2"	17.0 ppf	MAV-80	LTC	0'	8,000'	7-7/8"

5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

Surface hole: No BOPE will be utilized.

Intermediate hole: To be drilled using a diverter stack with rotating head to divert flow from rig floor.

Production hole: Prior to drilling out the intermediate casing shoe, 3,000 psi or greater BOP equipment will be installed.

The pipe rams will be operated at least once per day from intermediate casing to total depth. The blind rams will be tested once per day from intermediate casing to total depth if operations permit.

CONFIDENTIAL

DRILLING PLAN

APPROVAL OF OPERATIONS

A diagram of the planned BOP equipment for normal drilling operations in this area is attached. As denoted there will be two valves and one check valve on the kill line, two valves on the choke line, and two adjustable chokes on the manifold system. The BOP "stack" will consist of two BOP rams (1 pipe, 1 blind) and one annular type preventer, all rated to a minimum of 3,000 psi working pressure.

The BOP equipment will be pressure tested prior to drilling below the intermediate casing shoe. All test pressures will be maintained for fifteen (15) minutes without any significant pressure decrease. Clear water will be circulated into the BOP stack and lines prior to pressure testing. The following test pressures will be used as a minimum for various equipment items.

1.	Annular BOP	1,500 psi
2.	Ram type BOP	3,000 psi
3.	Kill line valves	3,000 psi
4.	Choke line valves and choke manifold valves	3,000 psi
5.	Chokes	3,000 psi
6.	Casing, casinghead & weld	1,500 psi
7.	Upper kelly cock and safety valve	3,000 psi
8.	Dart valve	3,000 psi

6. MUD SYSTEMS

- An air or an air/mist system may be used to drill the surface hole until water influx becomes too great.
- KCL mud system will be used to drill well.

<u>Depths</u>	<u>Mud Weight (ppg)</u>	<u>Mud System</u>
0' - 500'	8.4	Air foam mist, no pressure control
500' - 2,200'	8.6	Fresh water, rotating head and diverter
2,200' - 8,000'	8.6	Fresh water/2% KCL/KCL mud system

7. BLOOIE LINE

- An automatic igniter will not be installed on blooie line. The blooie will have a constant ignition source.
- A "target tee" connection will be installed on blooie line for 90° change of directions for abrasion resistance.
- "Target tee" connections will be a minimum of 50' from wellhead.
- The blooie line discharge will be a minimum of 100' from the wellhead.

8. AUXILIARY EQUIPMENT TO BE USED

- a. Kelly cock.
- b. Full opening valve with drill pipe connection will be kept on floor. Valve will be used when the kelly is not in string.

9. TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED

- A drillstem test in the Wasatch Tongue is possible.
- One electric line wire-log will be run from total depth to intermediate casing.
- The gamma ray will be left on to record from total depth to intermediate casing.
- Other log curves (resistivities, porosity, and caliper) will record from total depth to intermediate casing.
- A dipmeter, percussion cores, or rotary cores may be run over selected intervals.

10. ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED

- Expected BHP 1,500-2,000 psi (lower than normal pressure gradient).
- No abnormal temperature or pressures are anticipated.
- The formations to be penetrated do not contain known H₂S gas.

11. WATER SUPPLY

- No water pipelines will be laid for this well.
- No water well will be drilled for this well.
- Drilling water for this will be hauled on the road(s) shown in Attachment No. 3.
- Water will be hauled from: Water Permit # 43-10447 Section 9, Township 8 South, Range 20 East

CONFIDENTIAL

DRILLING PLAN

APPROVAL OF OPERATIONS

12. CEMENT SYSTEMS

a. Surface Cement:

Drill 17-1/2" hole to 500' and cement 13-3/8" to surface with 450 sks class "C" cement with 2% CaCl₂ and 1/4 #/sk. Poly-E-Flakes (volume includes 40% excess). Top out if necessary with Top Out cement listed below.

b. Intermediate Casing Cement:

- Drill 12-1/4" hole to 2,200'±, run and cement 8-5/8" to surface.
- Pump 20 bbls lightly weighted water spacer followed by 5 bbls fresh water. Displace with any available water.
- Casing to be run with: a) guide shoe b) insert float c) three (3) centralizers, one on each of first 3 joints d) stop ring for plug two joints off bottom e) bottom three joints thread locked f) pump job with bottom plug only.
- Cement to surface not required due to surface casing set deeper than normal.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	385	0'-1,700'	11.0 ppg	3.82 CFS	733 CF	1,466 CF	100%
Tail	370	1,700'-2,200'	15.6 ppg	1.20 CFS	220 CF	440 CF	100%

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
Slurry yield: 3.82 cf/sack Slurry weight: 11.00 #/gal.
Water requirement: 22.95 gal/sack
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
Pump Time: 1 hr. 5 min. @ 90 °F.
Compressives @ 95 °F: 24 Hour is 4,700 psi

c. Production Casing Cement:

- Drill 7-7/8" hole to 8,000'±, run and cement 5 1/2".
- Cement interface is at 4,000', which is typically 500'-1,000' above shallowest pay.
- Pump 20 bbl Mud Clean II unweighted spacer, followed by 20 Bbls fresh H2O spacer.
- Displace with 3% KCL.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	160	3,700'-4,700'	11.5 ppg	3.12 CFS	175 CF	350 CF	100%
Tail	435	4,700'-8,000'	13.0 ppg	1.75 CFS	473 CF	946 CF	100%

Note: Caliper will be run to determine exact cement volume.

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
Slurry yield: 3.12 cf/sack Slurry weight: 11.60 #/gal.
Water requirement: 17.71 gal/sack
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Halliburton HLC blend (Prem Plus V/JB flyash). Blend includes Class "G" cement, KCl, EX-1, Halad 322, & HR-5.
Slurry yield: 1.75 cf/sack Slurry weight: 13.00 #/gal.
Water requirement: 9.09 gal/sack
Compressives @ 165°F: 905 psi after 24 hours

13. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS

Starting Date: December 15, 2003
Duration: 14 Days

CONFIDENTIAL

SURFACE USE PLAN

CONDITIONS OF APPROVAL

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: WHB 6-26E
1730' FNL & 2055' FWL
Section 26-10S-19E
Uintah County, UT

The dirt contractor will be provided with an approved copy of the surface use plan of operations before initiating construction.

The onsite inspection for the referenced well was conducted on Wednesday, May 7, 2003 at approximately 12:15 pm. In attendance at the onsite inspection were the following individuals:

John Bingham	Company Representative	Dominion Exploration & Production, Inc.
Stephanie Howard	Environmental Scientist	Bureau of Land Management
Dixie Sadler	Wildlife Biologist	Bureau of Land Management
Robert Kay	Registered Land Surveyor	Uintah Engineering and Land Surveying
Gary Gerber	Foreman	Stubbs & Stubbs Oil Field Construction
Ryan Jackson	Foreman	Jackson Construction
Don Hamilton	Permitting Agent	Buys & Associates, Inc.

1. **Existing Roads:**

- a. The proposed well site is located approximately 12.22 miles southwest of Ouray, UT.
- b. Directions to the proposed well site have been attached at the end of Exhibit B.
- c. The use of roads under State and County Road Department maintenance is necessary to access the Wild Horse Bench Prospect. However, an encroachment permit is not anticipated since no upgrades to the State or County Road system are proposed at this time.
- d. All existing roads will be maintained and kept in good repair during all phases of operation.
- e. Vehicle operators will obey posted speed restrictions and observe safe speeds commensurate with road and weather conditions.
- f. Since no improvements are anticipated to the State, County or BLM access roads no topsoil striping will occur.
- g. An off-lease federal Right-of-Way is not anticipated for the access road or utility corridor since both are located within the existing lease boundary.

2. Planned Access Roads:

- a. From the existing gravel surfaced, Dominion maintained road an access is proposed trending southeast approximately 50' to the proposed well site. The access consists of entirely new disturbance and crosses no drainages. A road design plan is not anticipated at this time.
- b. The proposed access road will consist of a 14' travel surface within a 30' disturbed area. A pipeline corridor will be established along the southwest side of the road within the proposed 30' disturbed area.
- c. Proposed access will utilize entirely federal lands in which a right-of-way is not anticipated at this time. Approval to construct and utilize the proposed access road is requested with this application.
- d. A maximum grade of 10% will be maintained throughout the project with no cuts and fills required to access the well.
- e. No turnouts are proposed since the access road is only 50' long and good site distance exists in all directions.
- f. One 12" culvert as the access road enters the pad area is anticipated at this time. Adequate drainage structures will be incorporated into the remainder of road.
- g. No surfacing material will come from federal or Indian lands.
- h. No gates or cattle guards are anticipated at this time.
- i. Surface disturbance and vehicular travel will be limited to the approved location access road.
- j. All access roads and surface disturbing activities will conform to the standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, (1989).
- k. The operator will be responsible for all maintenance of the access road including drainage structures.

3. Location of Existing Wells:

- a. Following is a list of existing wells within a one mile radius of the proposed well:
 - i. Water wells None
 - ii. Injection wells None
 - iii. Disposal wells None
 - iv. Drilling wells None
 - v. Temp. shut-in wells None
 - vi. Producing wells 27
 - vii. Abandon wells 1
- b. Exhibit B has a map reflecting these wells within a one mile radius of the proposed well.

4. Location of Production Facilities:

- a. All permanent structures will be painted a flat, non-reflective Desert Brown to match the standard environmental colors. All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) may be excluded.
- b. Site security guidelines identified in 43 CFR 3163.7-5 and Onshore Oil and Gas Order No. 3 will be adhered to.
- c. A gas meter run will be constructed and located on lease within 500 feet of the wellhead. Meter runs will be housed and/or fenced. All gas production and measurement shall comply with the provisions of 43 CFR 3162.7-3, Onshore Oil and Gas Order No. 5, and American Gas Association (AGA) Report No. 3.
- d. A tank battery will be constructed on this lease, it will be surrounded by a dike of sufficient capacity to contain the storage capacity of the largest tank. All loading lines and valves will be placed inside the berm surrounding the tank battery. All liquid hydrocarbons production and measurement shall conform to the provisions of 43 CFR 3162.7-3 and Onshore Oil and Gas Order No. 4 and Onshore Oil and Gas Order No. 5 for natural gas production and measurement.
- e. Any necessary pits will be properly fenced to prevent any wildlife and livestock entry.
- f. All access roads will be maintained as necessary to prevent erosion and accommodate year-round traffic. The road will be maintained in a safe useable condition.
- g. The site will require periodic maintenance to ensure that drainages are kept open and free of debris, ice, and snow, and that surfaces are properly treated to reduce erosion, fugitive dust, and impacts to adjacent areas.
- h. A gas pipeline is associated with this application and is being applied for at this time. The proposed gas pipeline corridor will follow along the south side of the new access road then transition to the east side of the existing road to the main pipeline corridor.
- i. The gas pipeline will be a 4" steel surface line within a 20' wide utility corridor. The use of existing roads along the pipeline will facilitate the staging of the pipeline construction. A pipeline length of approximately 1,050' is associated with this well.
- j. Dominion intends on installing the pipeline on the surface by welding many joints into long lengths, dragging the long lengths into position and then completing a final welding pass to join the long lengths together. Dominion intends on connecting the pipeline together utilizing conventional welding technology.

5. Location and Type of Water Supply:

- a. The location and type of water supply has been addressed as number 11 within the previous drilling plan information.

6. Source of Construction Material:

- a. The use of materials will conform to 43 CFR 3610.2-3.
- b. No construction materials will be removed from BLM.
- c. If any gravel is used, it will be obtained from a state approved gravel pit.

7. Methods of Handling Waste Disposal:

- a. All wastes associated with this application will be contained and disposed of utilizing approved facilities.
- b. Drill cuttings will be contained and buried on site.
- c. The reserve pit will be located outboard of the location and along the southwest side of the pad.
- d. The reserve pit will be constructed so as not to leak, break, or allow any discharge.
- e. The reserve pit will be lined with 12 mil minimum thickness plastic nylon reinforced liner material. The liner will overlay a felt liner pad only if rock is encountered during excavation. The pit liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. Pit walls will be sloped no greater than 2:1. A minimum 2-foot freeboard will be maintained in the pit at all times during the drilling and completion operation.
- f. The reserve pit has been located in cut material. Three sides of the reserve pit will be fenced before drilling starts. The fourth side will be fenced as soon as drilling is completed, and shall remain until the pit is dry. After the reserve pit has dried, all areas not needed for production will be rehabilitated.
- g. No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completion of the well.
- h. Trash will be contained in a trash cage and hauled away to an approved disposal site as necessary but no later than at the completion of drilling operations. The contents of the trash container will be hauled off periodically to the approved Uintah County Landfill near Vernal, Utah.
- i. Produced fluids from the well other than water will be produced into a test tank until such time as construction of production facilities is completed. Any spills of oil, gas, salt water or other produced fluids will be cleaned up and removed.

- j. After initial clean-up, a 400 bbl tank will be installed to contain produced waste water. This water will be transported from the tank to an approved Dominion disposal well for disposal.
- k. After first production, produced wastewater will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90-day period, an application for approval of a permanent disposal method and location will be applied for in accordance with Onshore Order #7.
- l. Any salts and/or chemicals, which are an integral part of the drilling system, will be disposed of in the same manner as the drilling fluid.
- m. Sanitary facilities will be on site at all times during operations. Sewage will be placed in a portable chemical toilet and the toilet replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Vernal Wastewater Treatment Facility in accordance with state and county regulations.

8. Ancillary Facilities:

- a. Garbage Containers and Portable Toilets are the only ancillary facilities proposed in this application.

9. Well Site Layout: (See Exhibit B)

- a. The well will be properly identified in accordance with 43 CFR 3162.6.
- b. Access to the well pad will be from the northwest.
- c. The pad and road designs are consistent with BLM specification
- d. A pre-construction meeting with a responsible company representative, contractors, and the BLM will be conducted at the project site prior to commencement of surface-disturbing activities. The pad and road will be construction-staked prior to this meeting.
- e. The pad has been staked at its maximum size of 355' X 200'; however it will be constructed smaller if possible, depending upon rig availability. Should the layout change, this application will be amended and approved utilizing a sundry notice.
- f. All surface disturbing activities, will be supervised by a qualified, responsible company representative who is aware of the terms and conditions of the APD and specifications in the approved plans.
- g. All cut and fill slopes will be such that stability can be maintained for the life of the activity.
- h. Diversion ditches will be constructed as shown around the well site to prevent surface waters from entering the well site area.
- i. The site surface will be graded to drain away from the pit to avoid pit spillage during large storm events.
- j. The stockpiled topsoil (first 6 inches or maximum available) will be stored in a windrow on the uphill side of the location to prevent any possible contamination. All topsoil will be stockpiled for reclamation in such a way as to prevent soil loss and contamination.

- k. Pits will remain fenced until site cleanup.
- l. The blooie line will be located at least 100 feet from the well head.
- m. Water injection may be implemented if necessary to minimize the amount of fugitive dust.

10. Plans for Restoration of the Surface:

- a. Site reclamation for a producing well will be accomplished for portions of the site not required for the continued operation of the well.
- b. The Operator will control noxious weeds along access road use authorizations, pipeline route authorizations, well sites, or other applicable facilities by spraying or mechanical removal. A list of noxious weeds may be obtained from the BLM or the appropriate County Extension Office. On BLM administered land, it is required that a Pesticide Use Proposal be submitted and approved prior to the application of herbicides, pesticides or possibly hazardous chemicals.
- c. Upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1. Once the reserve pit is dry, the plastic nylon reinforced liner shall be torn and perforated before backfilling of the reserve pit. The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours.
- d. The cut and fill slopes and all other disturbed areas not needed for the production operation will be top soiled and re-vegetated. The stockpiled topsoil will be evenly distributed over the disturbed area.
- e. Prior to reseeding the site, all disturbed areas, including the access road, will be scarified and left with a rough surface. The site will then be seeded and/or planted as prescribed by the BLM. The BLM recommended seed mix is as follows:

Shads Scale	5 pounds per acre
Gardner Salt Brush	3 pounds per acre
Galleta Grass	3 pounds per acre
Crested Wheat Grass	1 pounds per acre

11. Surface and Mineral Ownership:

- a. Both Surface and Mineral Ownership is Federal under the management of the Bureau of Land Management – Vernal Field Office, 170 South 500 East, Vernal, Utah 84078; 435-781-4400.

12. Other Information:

- a. AIA Archaeological will conduct a Class III archeological survey. A copy of the pending report will be submitted under separate cover to the appropriate agencies by AIA Archaeological.
- b. Our understanding of the results of the onsite inspection are:
 - a. No Threatened and Endangered flora and fauna species were found during the onsite inspection.
 - b. The BLM will require a burrowing owl survey if construction is anticipated between April 1, and August 15 of any given year.
 - c. No significant nesting raptors species are anticipated in the area since suitable nesting habitat does not exist.
 - d. No drainage crossings that require additional State or Federal approval are being crossed

13. Operator's Representative and Certification

<u>Title</u>	<u>Name</u>	<u>Office Phone</u>
Company Representative (Roosevelt)	Mitchiel Hall	1-435-722-4521
Company Representative (Oklahoma)	Carla Christian	1-405-749-5263
Agent for Dominion	Don Hamilton	1-435-637-4075

Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exists; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Dominion Exploration & Production, Inc. and its contractors and subcontractors in conformity with this APD package and the terms and conditions under which it is approved. I also certify responsibility for the operations conducted on that portion of the leased lands associated with this application, with bond coverage being provided under Dominion's BLM bond. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Signature: Don Hamilton Date: 5-15-03

DOMINION EXPLR. & PROD., INC.

WHB #6-26E

SECTION 26, T10S, R19E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.1 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTH; TURN RIGHT AND PROCEED IN A NORTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN RIGHT AND PROCEED IN A NORTHWESTERLY DIRECTION APPROXIMATELY 2.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN LEFT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHEAST; FOLLOW ROAD FLAGS IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 50' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 51.4 MILES.

DOMINION EXPLR. & PROD., INC.

LOCATION LAYOUT FOR

WHB #6-26E

SECTION 26, T10S, R19E, S.L.B.&M.

C-1.0'
El. 86.6'

1730' FNL 2055' FWL


F-0.8'
El. 84.8'

Existing Road

F-4.3'
El. 81.3'

12" CMP @
Bar Ditch

Sta. 3+55



Approx.
Toe of
Fill Slope

SCALE: 1" = 50'
DATE: 5-2-03
Drawn By: C.G.

Approx.
Top of
Cut Slope

El. 88.4
C-10.8'
(btm. pit)

El. 90.0'
C-12.4'
(btm. pit)

Pit Topsoil
FLARE PIT

C-2.0'
El. 87.6'

20' WIDE BENCH

Pit Capacity With
2' of Freeboard
is 10,040 Bbls. ±

Sta. 1+10

RESERVE PITS
(8' Deep)

20' WIDE BENCH

C-2.6'
El. 88.2'

C-1.4'
El. 87.0'

C-0.8'
El. 86.4'

RIG

DOG HOUSE

Sta. 1+80

F-3.5'
El. 82.1'

TRAILER

TOILET

FUEL

CONSTRUCT
DIVERSION
DITCH

STORAGE
TANK

Existing
Drainage

Sta. 0+52

Round Corners
as Needed

Sta. 0+00

C-0.1'
El. 85.7'

Topsoil Stockpile

Elev. Ungraded Ground at Location Stake = 5286.4'
Elev. Graded Ground at Location Stake = 5285.6'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

DOMINION EXPLR. & PROD., INC.

TYPICAL CROSS SECTIONS FOR





WHB #6-26E

SECTION 26, T10S, R19E, S.L.B.&M.

1730' FNL 2055' FWL



1" = 20'
X-Section
Scale
1" = 50'
DATE: 5-2-03
Drawn By: C.G.

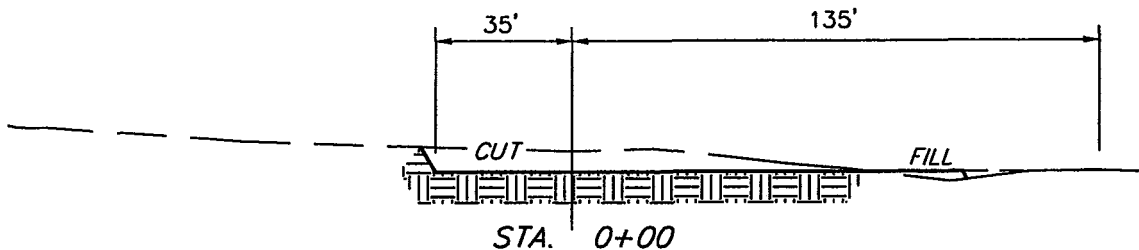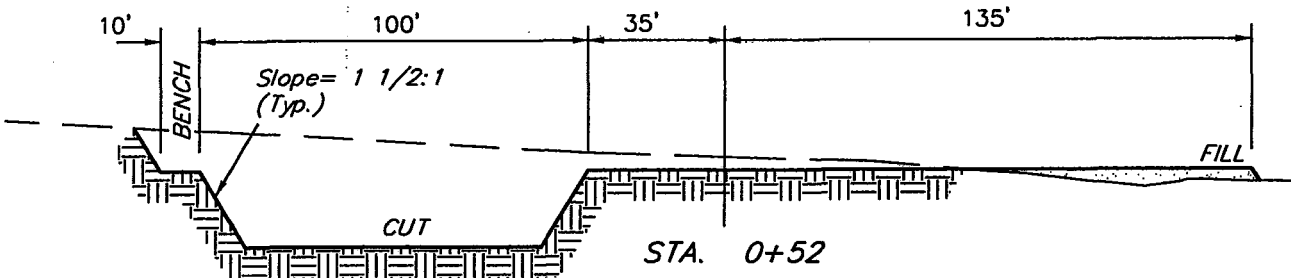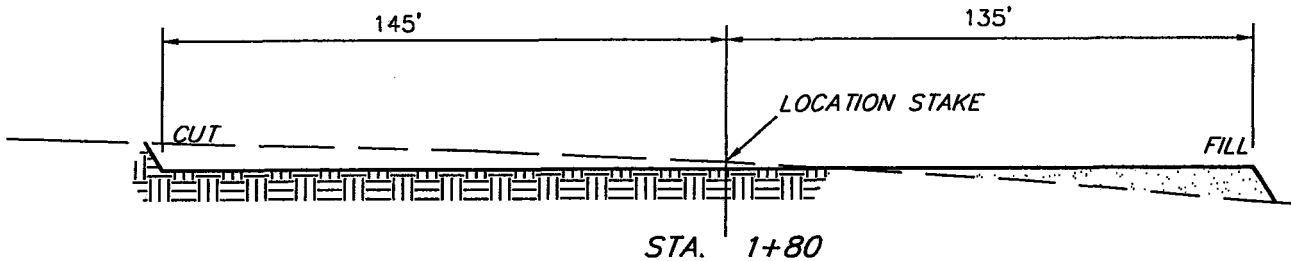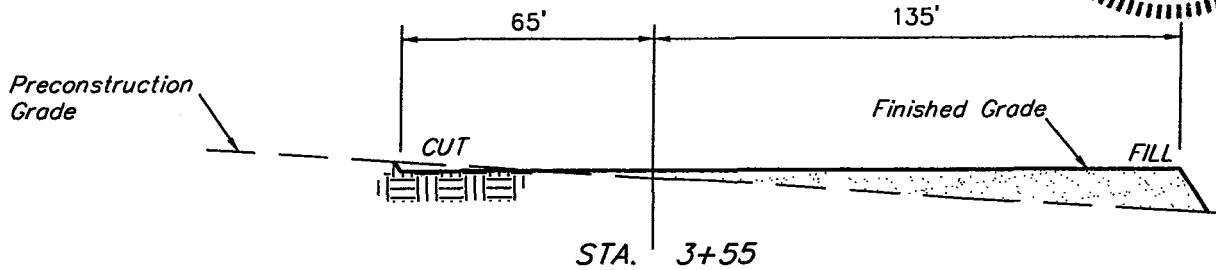

APPROXIMATE YARDAGES

CUT

(6") Topsoil Stripping = 1,570 Cu. Yds.

Remaining Location = 4,900 Cu. Yds.

TOTAL CUT = 6,470 CU.YDS.

FILL = 3,200 CU.YDS.

EXCESS MATERIAL AFTER

5% COMPACTION = 3,100 Cu. Yds.

Topsoil & Pit Backfill = 3,100 Cu. Yds.
(1/2 Pit Vol.)

EXCESS UNBALANCE = 0 Cu. Yds.
(After Rehabilitation)

UINTAH ENGINEERING & LAND SURVEYING

85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

DOMINION EXPLR. & PROD., INC.

WHB #6-26E

LOCATED IN UINTAH COUNTY, UTAH
SECTION 26, T10S, R19E, S.L.B.&M.

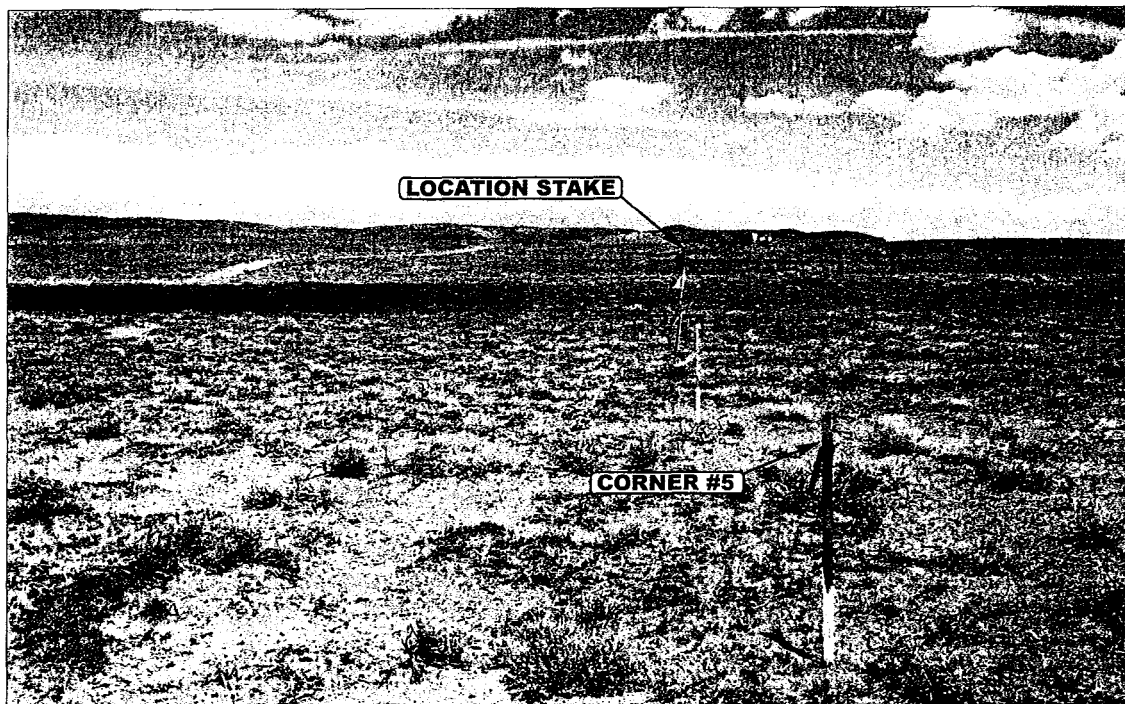


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY

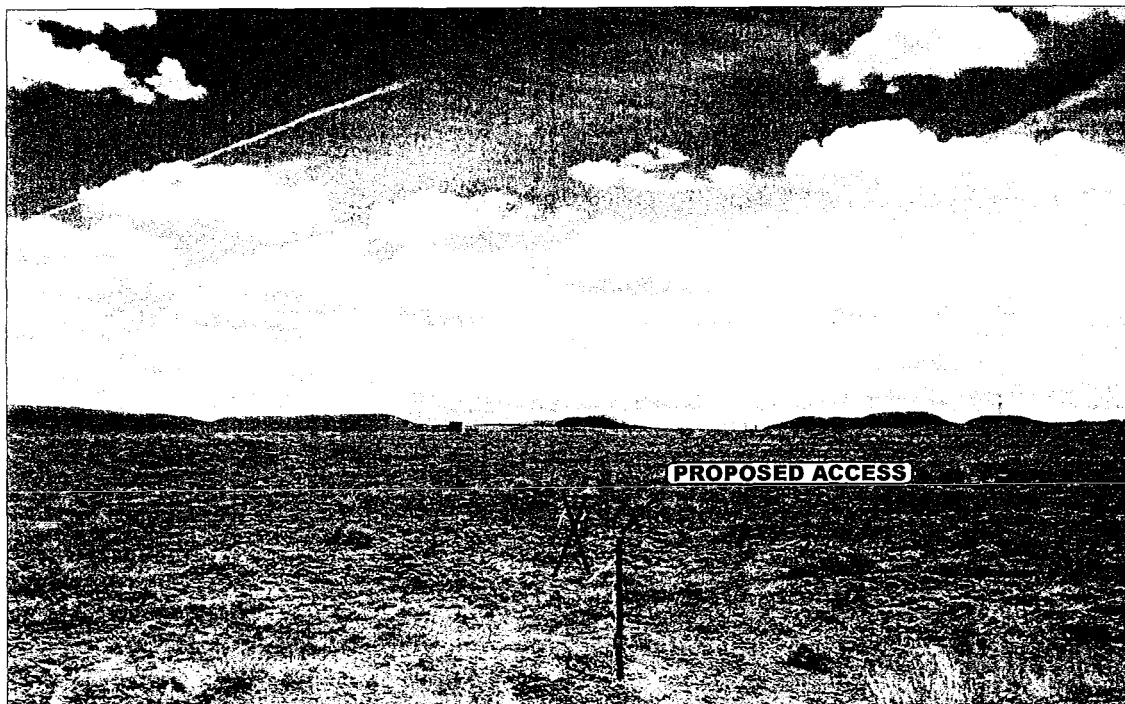


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHEASTERLY



- Since 1964 -

Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


05 05 03
MONTH DAY YEAR

PHOTO

TAKEN BY: K.K.

DRAWN BY: P.M.

REVISED: 00-00-00

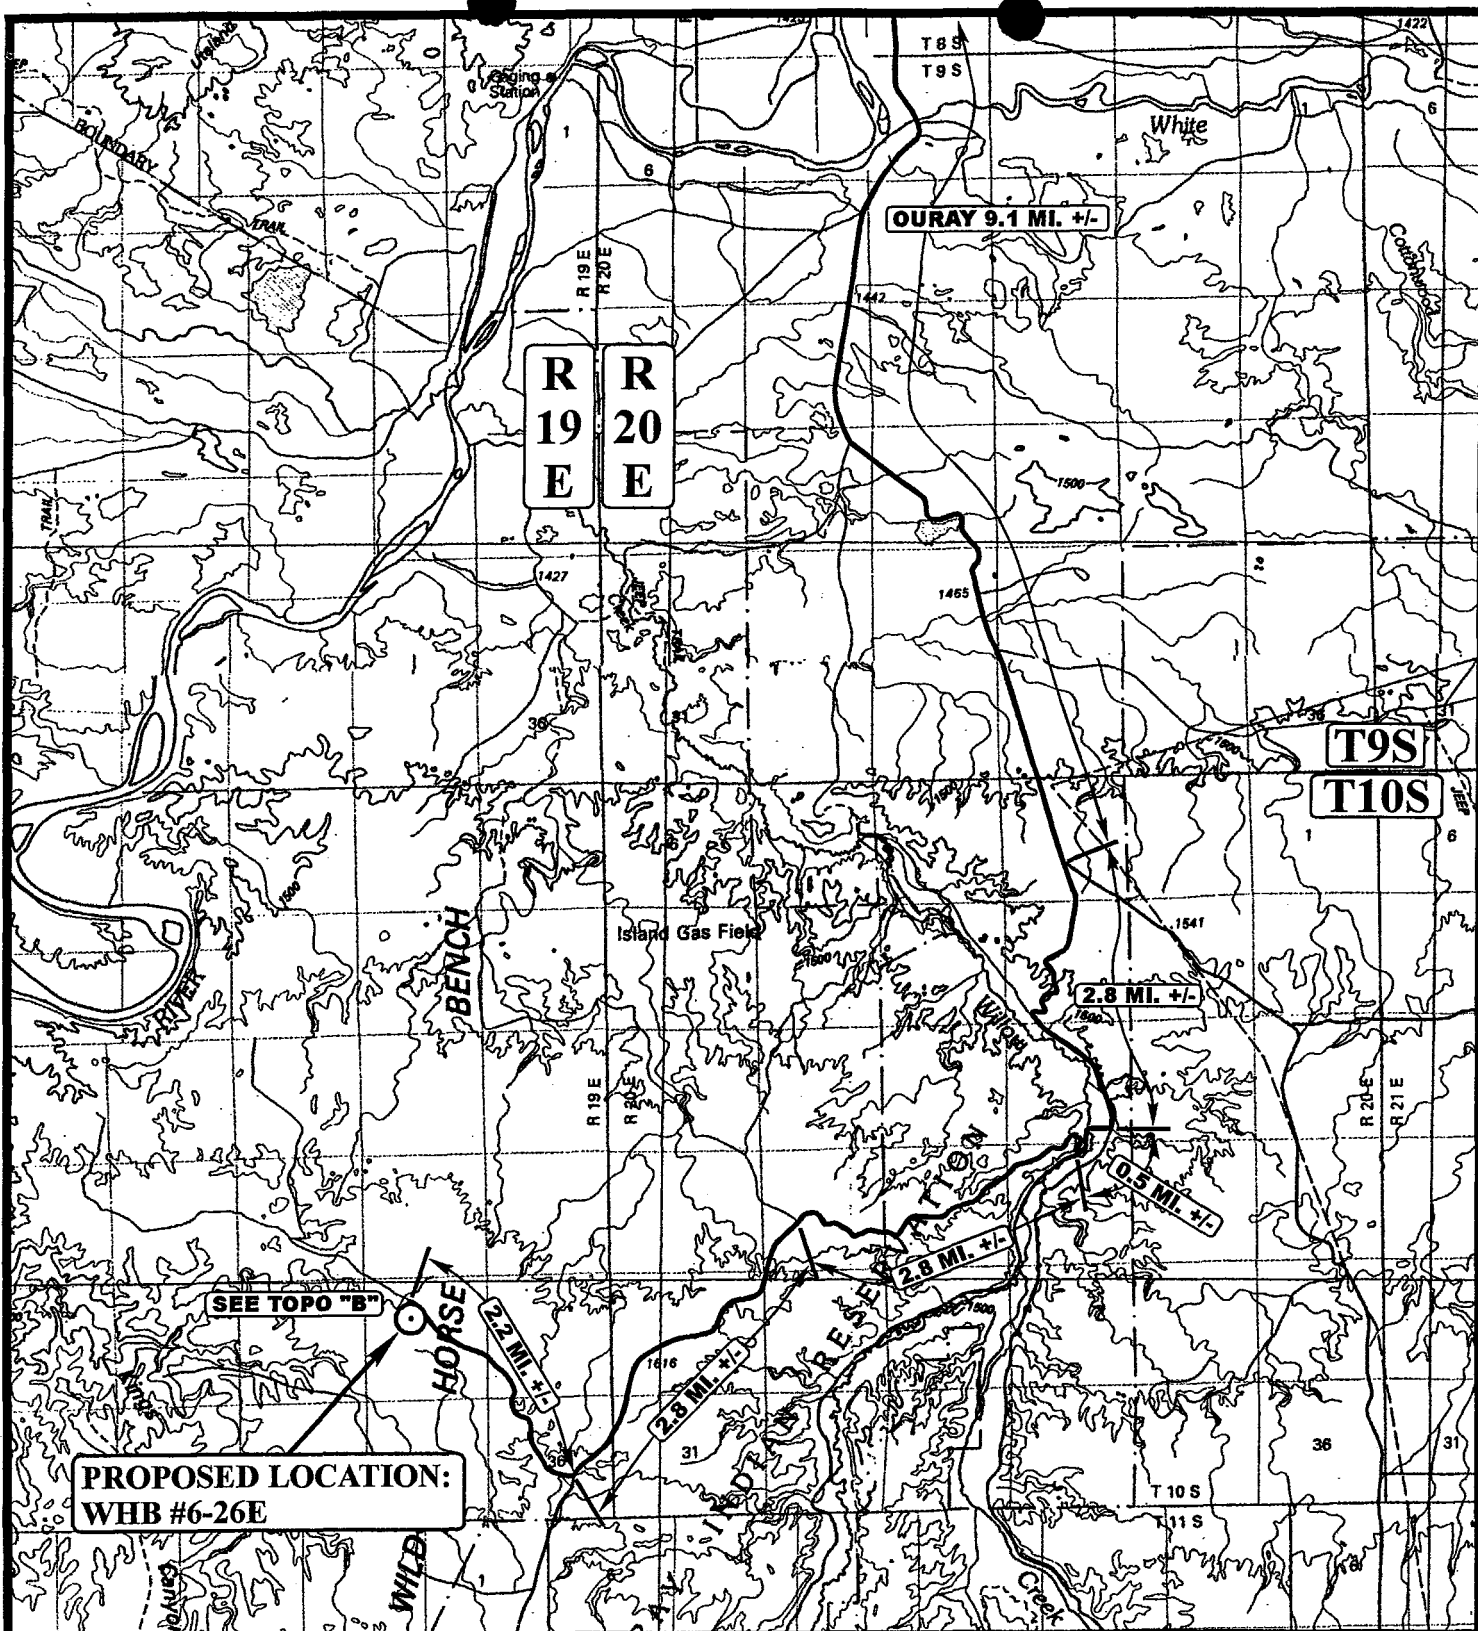

LEGEND:

○ PROPOSED LOCATION

N

DOMINION EXPLR. & PROD., INC.

WHB #6-26E

SECTION 26, T10S, R19E, S.L.B.&M.

1730' FNL 2055' FWL




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

05 05 03
MONTH DAY YEAR

SCALE: 1:100,000 | DRAWN BY: P.M. | REVISED: 00-00-00



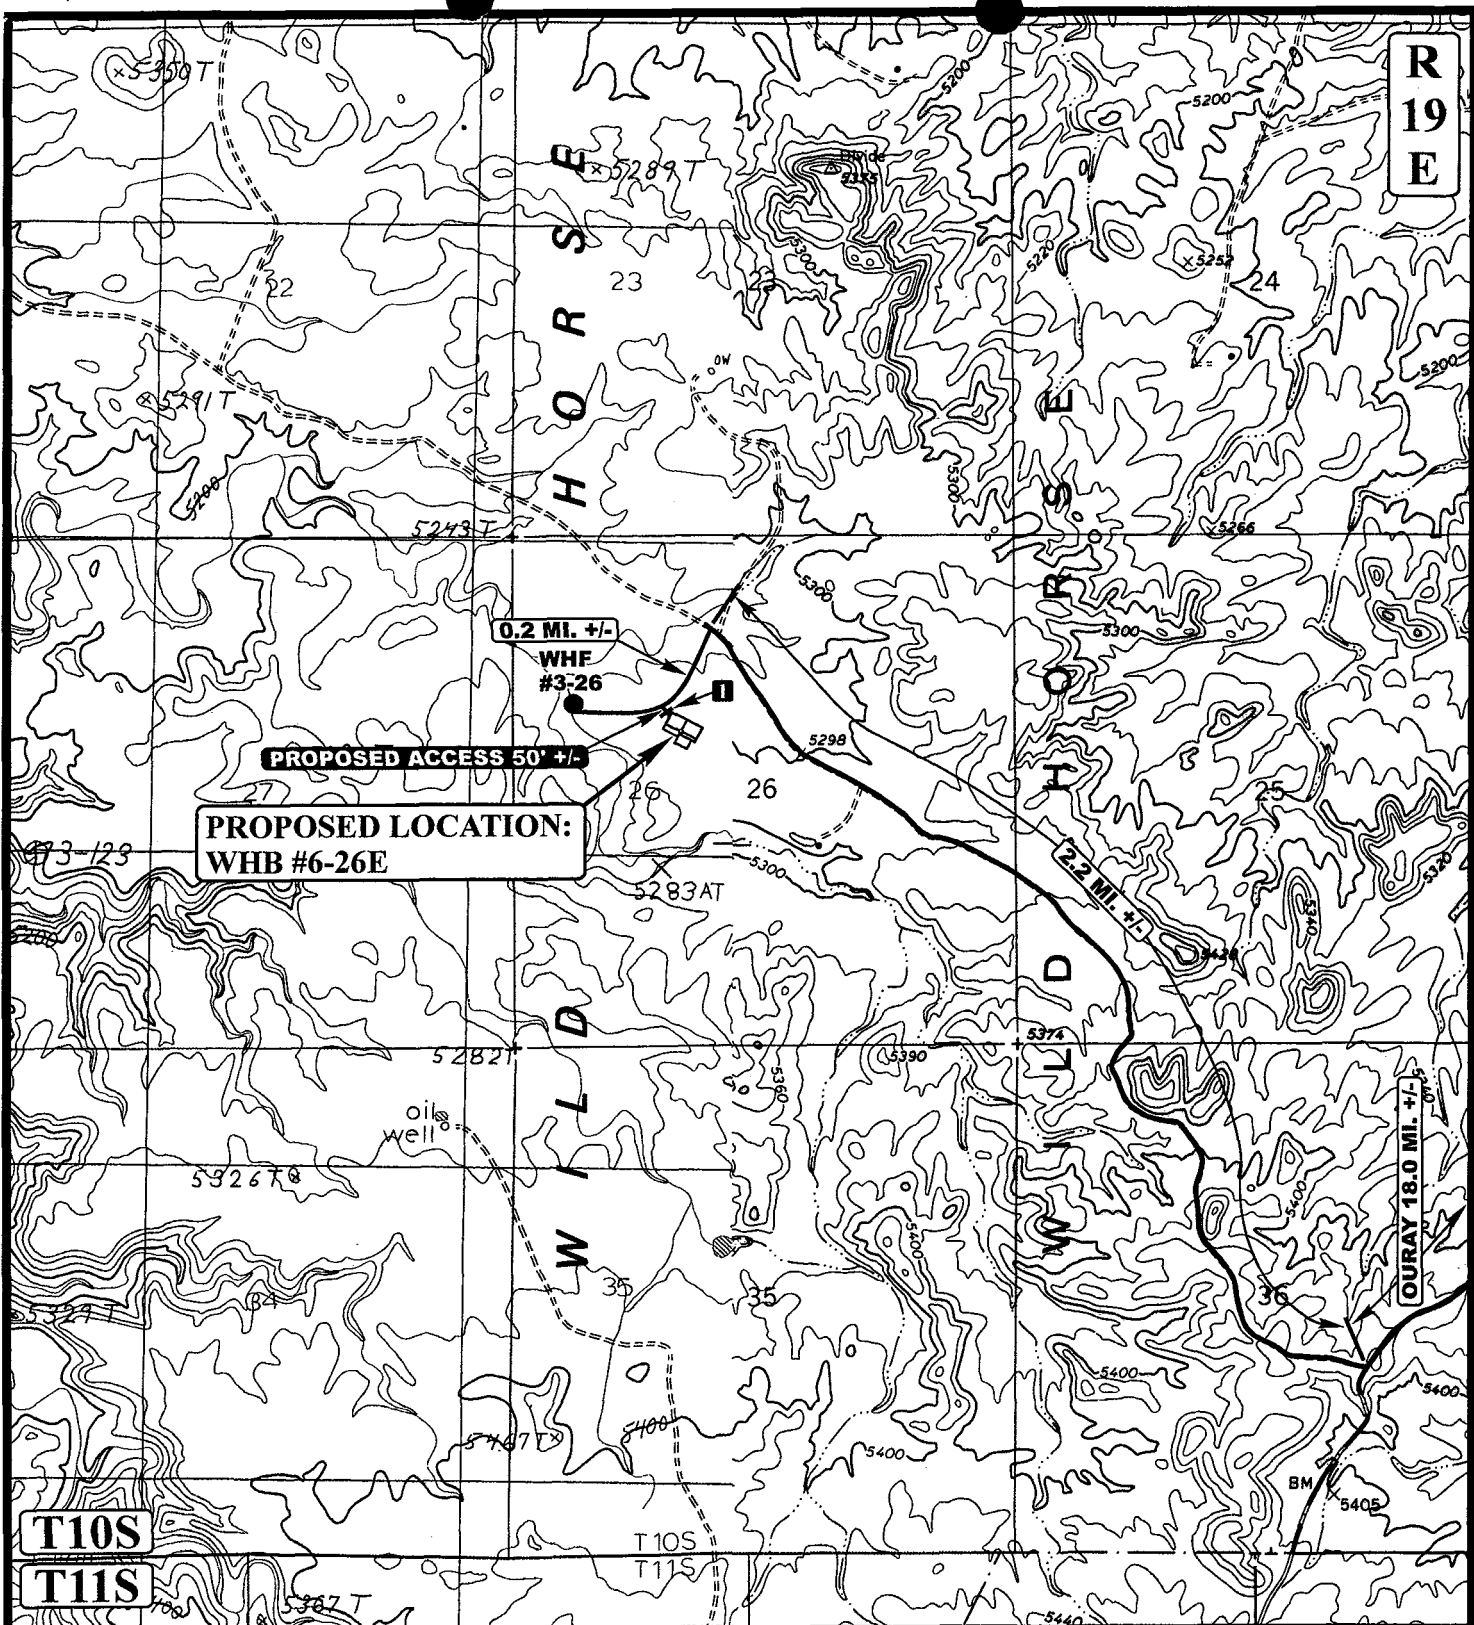

LEGEND:

- EXISTING ROAD
- PROPOSED ACCESS ROAD
- 12" CMP REQUIRED

DOMINION EXPLR. & PROD., INC.

WHB #6-26E
SECTION 26, T10S, R19E, S.L.B.&M.
1730' FNL 2055' FWL




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

05 05 03
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00

B
TOPO

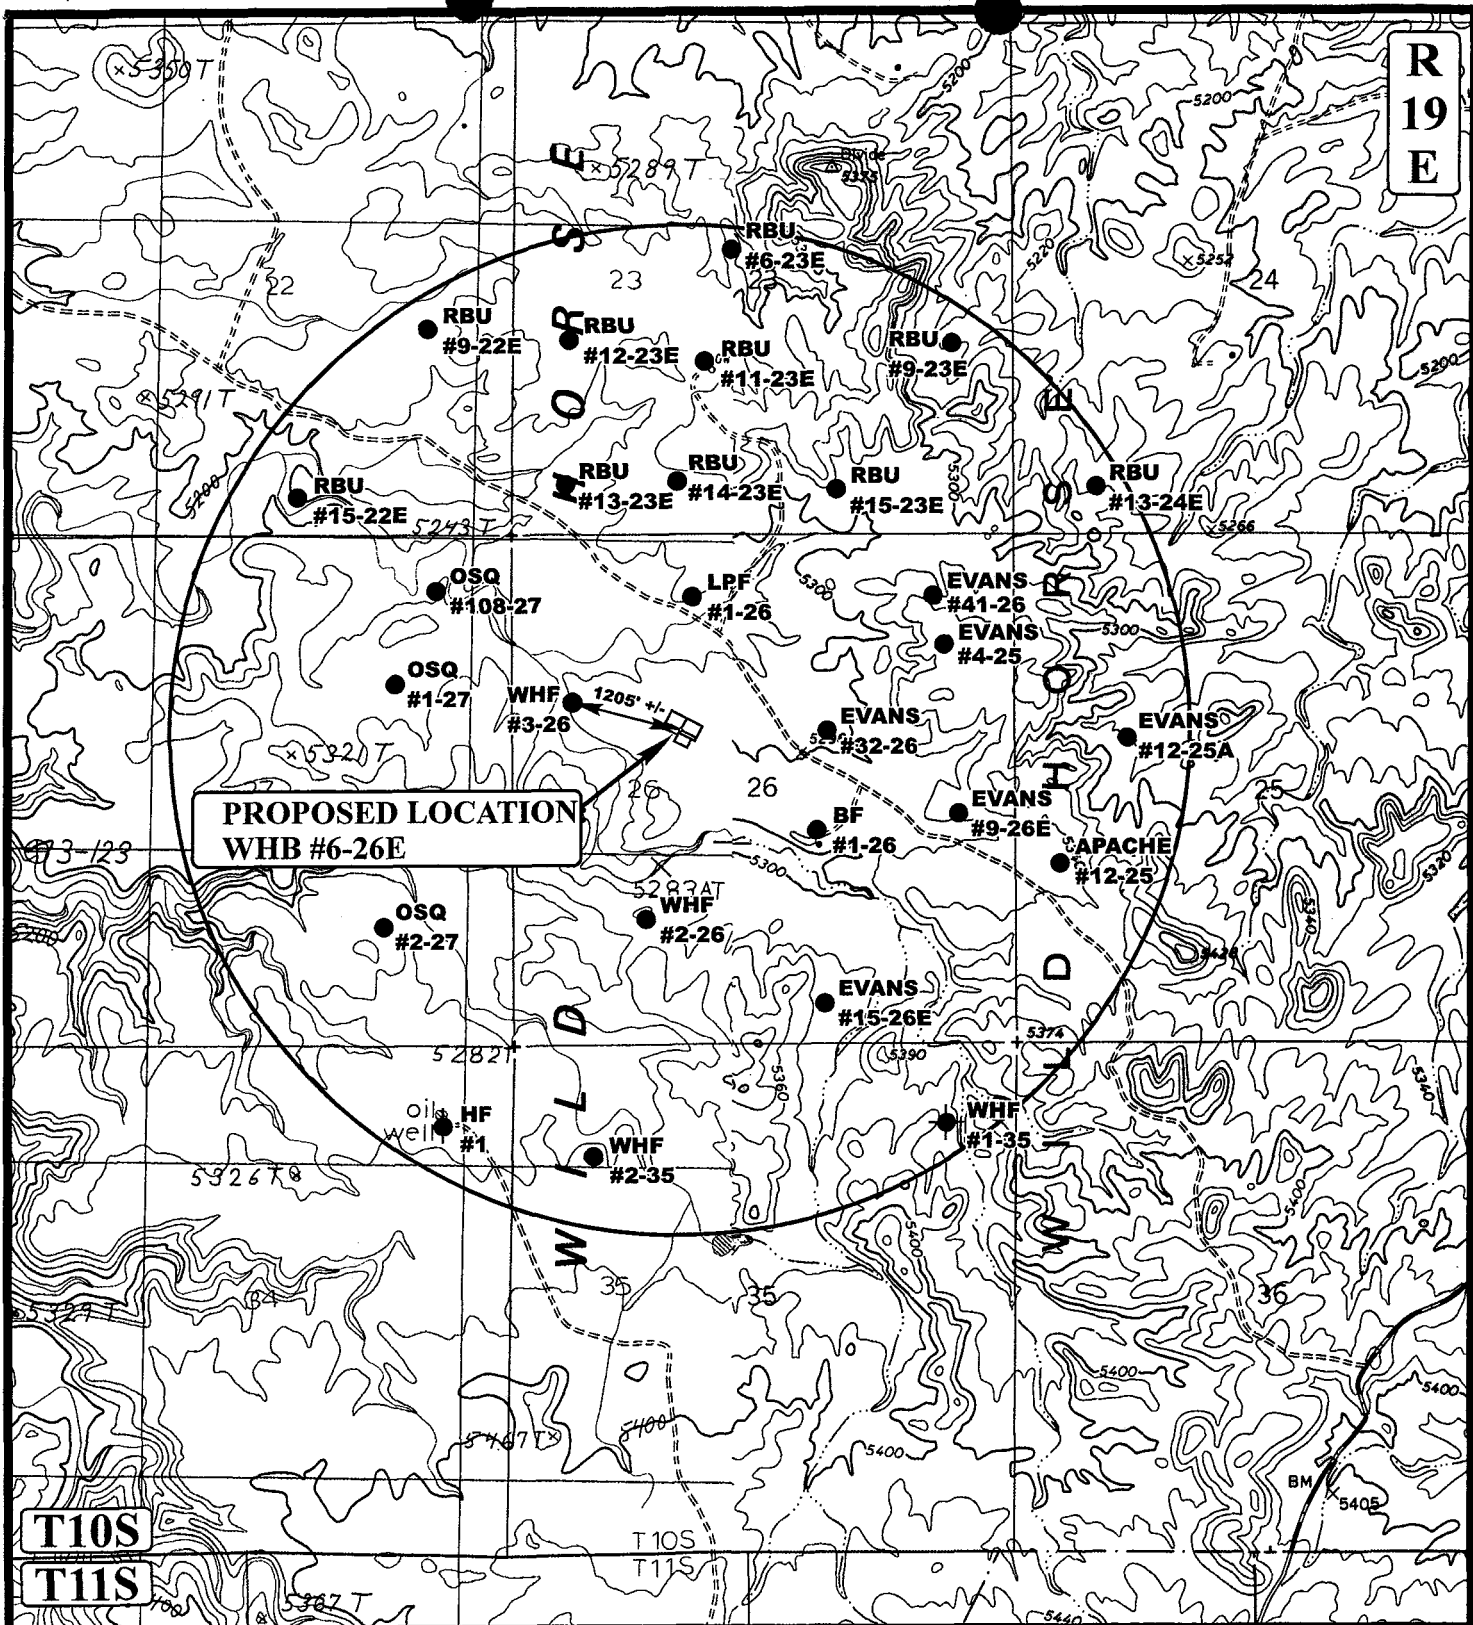

LEGEND:

- | | |
|-------------------|-------------------------|
| ○ DISPOSAL WELLS | ○ WATER WELLS |
| ● PRODUCING WELLS | ● ABANDONED WELLS |
| ● SHUT IN WELLS | ● TEMPORARILY ABANDONED |



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



DOMINION EXPLR. & PROD., INC.

WHB #6-26E
SECTION 26, T10S, R19E, S.L.B.&M.
1730' FNL 2055' FWL

TOPOGRAPHIC
M A P

05 05 03
MONTH DAY YEAR


SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00



CONFIDENTIAL

LEGEND

O = Oil Line
 G = Gas Line
 W = Water Line
 R = Relief Line (Pressure)
 C = Condensate Line
 V = Vent Line
 D = Drain Line
 M = Gas Meter
 P = Pump
 BP = Back Pressure Valve
 SWS = Sealed When Shipping
 SUS = Sealed Unless Shipping
 T = Heat Traced Line
 H = Heater
 BL = Buried Line
 X = Valve
 / = Check Valve
 SC = Sealed Closed Valve
 NC = Normally Closed
 BD = Blowdown Line

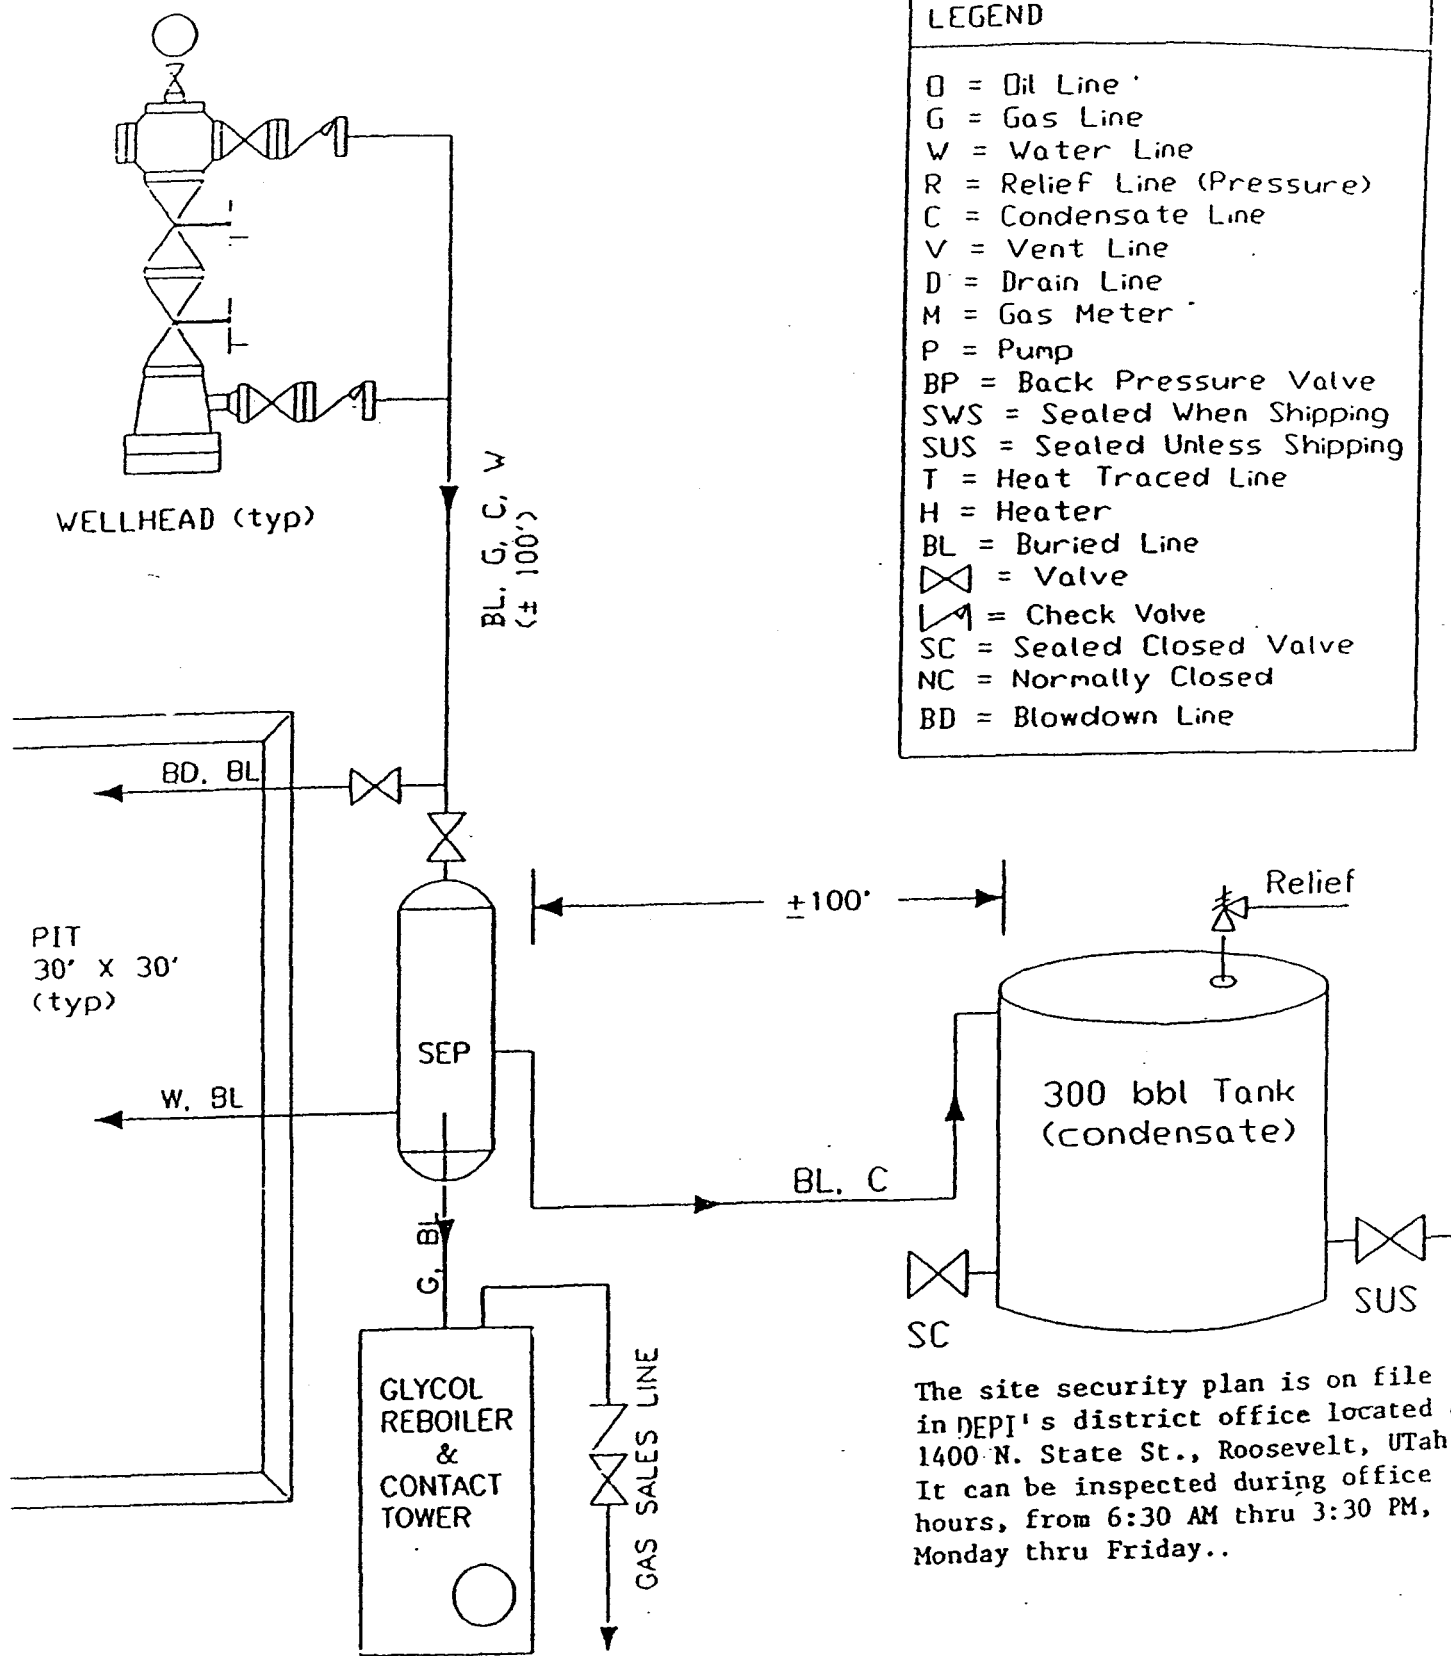


The site security plan is on file in DEPI's district office located at 1400 N. State St., Roosevelt, Utah. It can be inspected during office hours, from 6:30 AM thru 3:30 PM, Monday thru Friday..

DOMINION EXPLORATION & PRODUCTION, INC.


all:

not to scale

BOP STACK

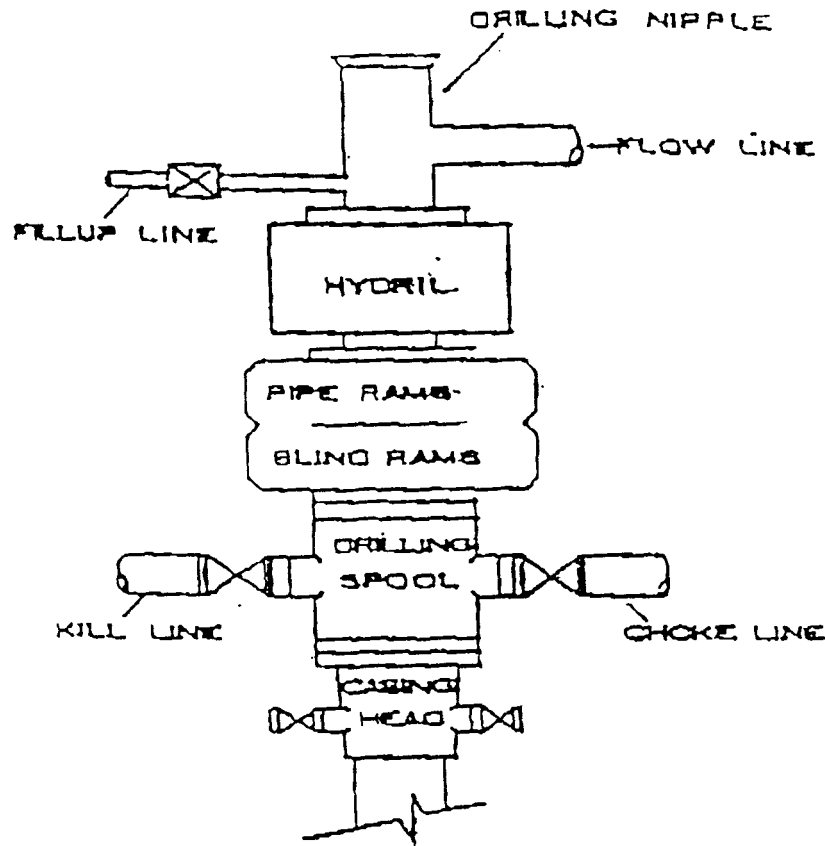

CHOKE MANIFOLD

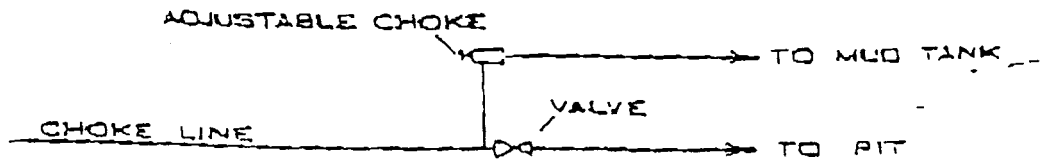

003

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 05/23/2003

API NO. ASSIGNED: 43-047-34985

WELL NAME: WHB 6-26E

OPERATOR: DOMINION EXPL & PROD (N1095)

CONTACT: DON HAMILTON

PHONE NUMBER: 435-687-5310

PROPOSED LOCATION:

SENW 26 100S 190E

SURFACE: 1730 FNL 2055 FWL

BOTTOM: 1730 FNL 2055 FWL

UINTAH

NATURAL BUTTES (630)

LEASE TYPE: 1 - Federal

LEASE NUMBER: U-43156

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MVRD

INSPECT LOCATN BY: / /

Tech Review

Initials

Date

Engineering

Geology

Surface

LATITUDE: 39.92061

LONGITUDE: 109.75068

RECEIVED AND/OR REVIEWED:

☒ Plat
☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. 76S630500330)
☒ Potash (Y/N)
☒ Oil Shale 190-5 (B) or 190-3 or 190-13
☒ Water Permit
(No. 43-10447)
☒ RDCC Review (Y/N)
(Date:)
☒ Fee Surf Agreement (Y/N)

LOCATION AND SITING:

R649-2-3.

Unit

R649-3-2. General

Siting: 460 From Qtr/Qtr & 920' Between Wells

☒ R649-3-3. Exception

Drilling Unit

Board Cause No:

Eff Date:


Siting:

R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS: 1- Federal Approval

2. Spacing

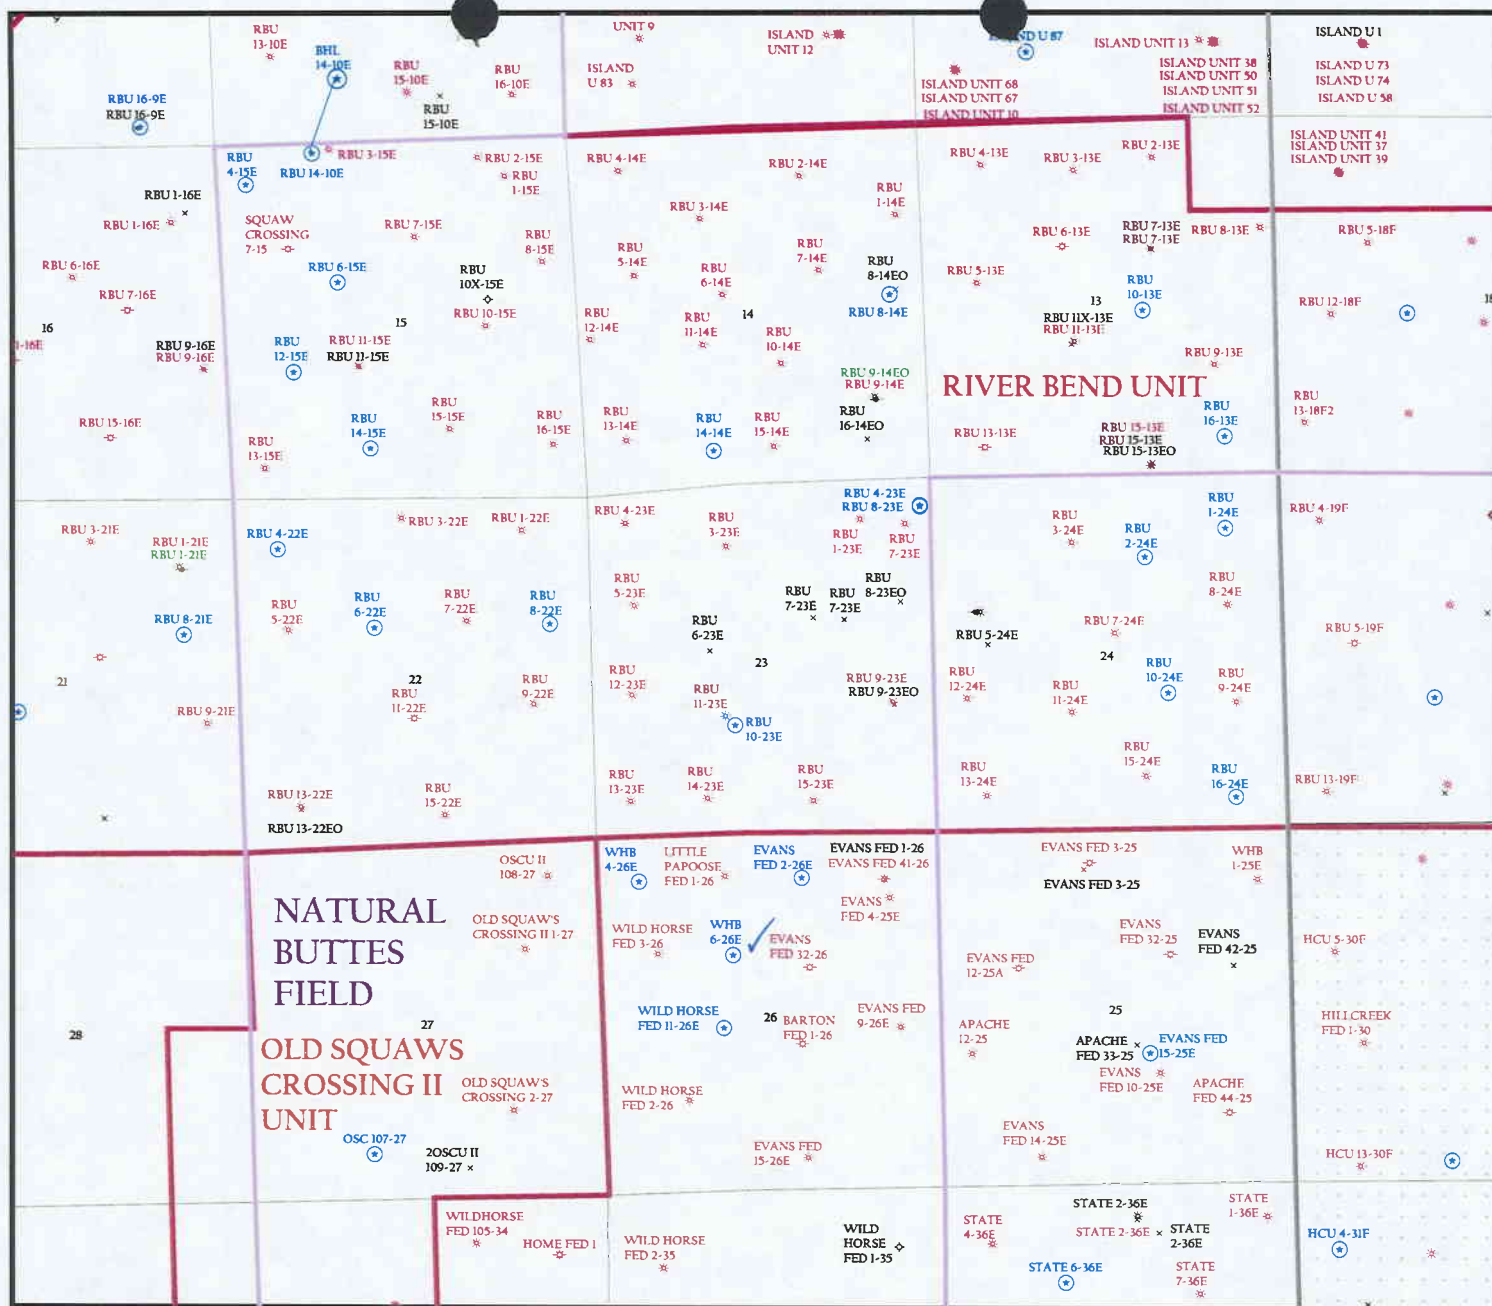

OPERATOR: DOMINION EXPL & PROD (N1095)

SEC. 26 T.10S, R.19E

FIELD: NATURAL BUTTES (630)

COUNTY: Uintah

SPACING: R649-3-3 / EXCEPTION LOCATION

Wells


- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Field Status

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

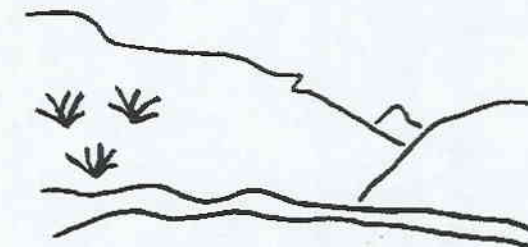

Utah Oil Gas and Mining





State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
(801) 538-5340 telephone
(801) 359-3940 fax
(801) 538-7223 TTY
www.nr.utah.gov

Michael O. Leavitt
Governor

Robert L. Morgan
Executive Director

Lowell P. Braxton
Division Director

May 28, 2003

Dominion Exploration & Production, Inc.
14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134

Re: Wild Horse Bench 6-26E Well, 1730' FNL, 2055' FWL, SE NW, Sec. 26, T. 10 South,
R. 19 East, Uintah County, Utah


Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-34985.

Sincerely,



John R. Baza
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Dominion Exploration & Production, Inc.
Well Name & Number Wild Horse Bench 6-26E
API Number: 43-047-34985
Lease: U-43156

Location: SE NW **Sec.** 26 **T.** 10 South **R.** 19 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

UNITED STATES

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

005

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒DEEPEN ☐

b. TYPE OF WELL

OIL
WELL ☐

GAS

WELL ☒

OTHER

SINGLE
ZONE ☒MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

Dominion Exploration & Production, Inc.

3. ADDRESS AND TELEPHONE NO.

14000 Quail Springs Parkway, Suite 600, Oklahoma City, OK 73134, 405-749-6690

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*

At surface

1,730' FNL, 2,055' FWL

SE/4 NW/4

At proposed prod. zone

1,730' FNL, 2,055' FWL

SE/4 NW/4

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

12.22 miles southwest of Ouray, Utah

15. DISTANCE FROM PROPOSED*
LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drg. unit line, if any)

937'

16. NO. OF ACRES IN LEASE

600

17. NO. OF ACRES ASSIGNED
TO THIS WELL

40 acres

18. DISTANCE FROM PROPOSED
LOCATION TO NEAREST WELL,
DRILLING, COMPLETED, OR
APPLIED FOR, ON THIS LEASE, FT.

1,205'

19. PROPOSED DEPTH

8,000'

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

5,157' GR

22. APPROX. DATE WORK WILL START*

December 15, 2003

23.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
17-1/2"	13-3/8" H-40 ST&C	48#	500'	450 sacks Class G cement + 2% CaCl ₂ + 1/4 #/sk. Poly-E-Flakes
12-1/4"	8-5/8" J-55 LT&C	32#	2,200'	385 sacks Lead and 370 sacks Tail (see Drilling Plan)
7-7/8"	5-1/2" Mav-80 LT&C	17#	8,000'	160 sacks Lead and 435 sacks Tail (see Drilling Plan)

Bond Information:

Bond coverage is provided by Travelers Casualty and Surety Company of America, Bond #76S 63051930

Other Information:

Drilling Plan and Surface Use Plan are attached.

Dominion requests that this complete application for permit to drill be held confidential.

A request for exception to spacing (R649-3-11) is hereby requested based on topography since the well is located within 460' of the drilling unit boundary. Dominion Exploration & Production, Inc. is the only owner and operator within 460' of the proposed well.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED Don Hamilton Don Hamilton

TITLE

Agent for Dominion

DATE May 15, 2003

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

NOTICE OF APPROVAL

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY

TITLE

Assistant Field Manager
Mineral Resources

DATE

09/22/2003

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency or the

CONDITIONS OF APPROVAL ATTACHED

032111/424A

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Dominion Exploration & Production Inc.

Well Name & Number: WHB 6-26E

API Number: 43-047-34985

Lease Number: UTU - 43156

Location: SEnw Sec. 26 TWN: 10S RNG: 19E

Agreement: CR-200

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Submit an electronic copy of all logs run on this well in LAS format. This submission will replace the requirement for submittal of paper logs to the BLM.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands encountered to John Mayers of this office prior to setting the next casing string or requesting plugging orders. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint. Surface casing setting depths are based on ground level elevations only.

As a minimum, the usable water shall be isolated and/or protected by having a cement top for the intermediate casing at least 200 ft. above the top of the Green River Formation, identified at ± 910 ft. and having a cement top for the production casing at least 200 ft. above the base of the usable water zone, identified at $\pm 5,160$ ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor proof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig. The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office.

All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 828-7874
Petroleum Engineer

Kirk Fleetwood (435) 828-7875
Petroleum Engineer

BLM FAX Machine (435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids

CONDITIONS OF APPROVAL
For The Surface Use Program Of The
Application For Permit To Drill

- A plastic and a felt liner are required in the reserve pit.
- No construction or surface disturbing activities may occur during the burrowing owl nesting season of April 1 to August 15. If Dominion proposed to start construction during this time frame, a qualified biologist may conduct a burrowing owl survey. If no birds are present at the time of the survey, Dominion may begin construction.
- The seed mix for this location shall be:

Shadscale	<i>Atriplex confertifolia</i>	5 lbs./acre
Gardner saltbush	<i>Atriplex gardneri</i>	3 lbs./acre
Galleta grass	<i>Hilaria jamesii</i>	3 lbs./acre
Crested wheatgrass	<i>Agropyron cristatum</i>	1 lb. /acre

-All poundages are in pure live seed.

-Reseeding may be required if first seeding is not successful.

- 4 to 6 inches of topsoil should be stripped from the location and windrowed as shown on the cut sheet. The topsoil shall then be broadcast seeded with the recommended seed mix immediately after it has been windrowed and the seed walked into the soil with a dozer.
- The topsoil from the reserve pit should be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be seeded in the same manner as the location topsoil.
- Once the location is plugged and abandoned, it shall be recontoured to natural contours, topsoil respread where appropriate, and the entire location seeded with the recommended seed mix. Seeding should take place by broadcasting the seed and walking it into the soil with a dozer immediately after the dirt work is completed.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

006

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-43156	
2. Name of Operator DOMINION EXPL. & PROD., INC.		6. If Indian, Allottee or Tribe Name	
3a. Address 14000 QUAIL SPRINGS PARKWAY, SUITE 600 OKLAHOMA CITY, OK 73134		7. If Unit or CA/Agreement, Name and/or No.	
3b. Phone No. (include area code) Ph: 405.749.5263 Fx: 405.749.6690		8. Well Name and No. WHB 6-26E	
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 26 T10S R19E SENW 1730FNL 2055FWL		9. API Well No. 43-047-34985	
		10. Field and Pool, or Exploratory NATURAL BUTTES	
		11. County or Parish, and State UINTAH COUNTY, UT	

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Change to Original A PD
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Dominion hereby request an extension to the STATE APD which expires May 28, 2004.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 05-25-04
By: [Signature]

COPY SENT TO OPERATOR
Date: 5-26-04
Initials: CHD

14. I hereby certify that the foregoing is true and correct. Electronic Submission #30639 verified by the BLM Well Information System For DOMINION EXPL. & PROD., INC., sent to the Vernal	
Name (Printed/Typed) CARLA CHRISTIAN	Title AUTHORIZED REPRESENTATIVE
Signature [Signature] (Electronic Submission)	Date 05/12/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED**

RECEIVED

MAY 17 2004

DIV. OF OIL, GAS & MINING

CONFIDENTIAL

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-34985
Well Name: WHB 6-26E
Location: Section 26-10S-19E, 1730' FNL & 2055' FWL
Company Permit Issued to: Dominion Exploration & Production, Inc.
Date Original Permit Issued: 5/28/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Carla Christian
Signature

5/17/2004
Date

Title: Regulatory Specialist

Representing: Dominion Exploration & Production, Inc.

RECEIVED

MAY 20 2004

DIV. OF OIL, GAS & MIN.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU43156
2. Name of Operator DOMINION EXPL & PRODUCTION INC		6. If Indian, Allottee or Tribe Name
Contact: CARLA CHRISTIAN E-Mail: Carla_M_Christian@dom.com		7. If Unit or CA/Agreement, Name and/or No. UTU60759
3a. Address 14000 QUAIL SPRINGS PKWY, #600 OKLAHOMA CITY, OK 73134-2600	3b. Phone No. (include area code) Ph: 405.749.5263 Fx: 405.749.6690	8. Well Name and No. WHB 6-26E
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 26 T10S R19E SENW 1730FNL 2055FWL		9. API Well No. 43-047-34985-00-X1
		10. Field and Pool, or Exploratory NATURAL BUTTES
		11. County or Parish, and State UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Dominion hereby request an extension to the STATE APD which expires May 28, 2004.

14. I hereby certify that the foregoing is true and correct. Electronic Submission #30639 verified by the BLM Well Information System For DOMINION EXPL & PRODUCTION INC, sent to the Vernal Committed to AFMSS for processing by LESLIE WALKER on 06/15/2004 (04LW3718SE)	
Name (Printed/Typed) CARLA CHRISTIAN	Title AUTHORIZED REPRESENTATIVE
Signature (Electronic Submission)	Date 05/12/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <u>KIRK FLEETWOOD</u>	Title <u>PETROLEUM ENGINEER</u>	Date <u>06/17/2004</u>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office <u>Vernal</u>

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

Revisions to Operator-Submitted EC Data for Sundry Notice #30639

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	APDCH NOI	APDCH NOI
Lease:	U-43156	UTU43156
Agreement:		UTU60759
Operator:	DOMINION EXPL. & PROD., INC. 14000 QUAIL SPRINGS PARKWAY, SUITE 600 OKLAHOMA CITY, OK 73134 Ph: 405.749.5263 Fx: 405.749.6690	DOMINION EXPL & PRODUCTION INC 14000 QUAIL SPRINGS PKWY, #600 OKLAHOMA CITY, OK 73134-2600 Ph: 405.749.5273
Admin Contact:	CARLA CHRISTIAN AUTHORIZED REPRESENTATIVE E-Mail: Carla_M_Christian@dom.com Ph: 405.749.5263 Fx: 405.749.6690	CARLA CHRISTIAN AUTHORIZED REPRESENTATIVE E-Mail: Carla_M_Christian@dom.com Ph: 405.749.5263 Fx: 405.749.6690
Tech Contact:		
Location:		
State:	UT	UT
County:	UINTAH	UINTAH
Field/Pool:	NATURAL BUTTES	NATURAL BUTTES
Well/Facility:	WHB 6-26E Sec 26 T10S R19E SENW 1730FNL 2055FWL	WHB 6-26E Sec 26 T10S R19E SENW 1730FNL 2055FWL

Dominion Exploration and Prod. Inc.
APD Extension

Well: RBU 6-26E

Location: SENW Sec. 26 T10S, R19E

Lease: U-43156

Conditions of Approval

An extension for the referenced APD is granted with the following condition(s):

1. The extension will expire 9/22/05
2. No other extensions beyond that time frame will be granted or allowed.

If you have any other questions concerning this matter, please contact Kirk Fleetwood at (435) 781-4486.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

008

SUBMIT IN TRIPlicate - Other Instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Dominion Exploration & Production, Inc.

3a. Address Suite 600
14000 Quail Springs Parkway, OKC, OK 73134

3b. Phone No. (include area code)
(405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1730' FNL & 2055' FWL, SE/NW Sec. 26-10S-19E

5. Lease Serial No.

UTU-43156

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Wild Horse Bench 6-26E

9. API Well No.

43-047-34985

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Acidize

☐ Altering Casing

☐ Casing Repair

☒ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☐ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity

☐ Other

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen, directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Dominon would like to eliminate the 13 3/8" surface csg., and change the TD to 8,200' per the attached drilling plan.

Federal Approval of this
Action is Necessary

Approved by the
Oil, Gas and Mining

Date:

By:

COPY SENT TO OPERATOR

Date:

Initials:

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

Date 03/15/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

MAR 22 2005

DIV. OF OIL, GAS & MINING

DRILLING PLAN

APPROVAL OF OPERATIONS

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: WHB 6-26E
1730' FNL & 2055' FWL
Section 15-10S-19E
Uintah County, UT

1. GEOLOGIC SURFACE FORMATION Uintah

2. ESTIMATED DEPTHS OF IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Green River	1,096'
Wasatch Tongue	4,006'
Uteland Limestone	4,336'
Wasatch	4,496'
Chapita Wells	5,396'
Uteland Buttes	6,596'
Mesaverde	7,696'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth</u>	<u>Type</u>
Green River	1,096'	Oil
Wasatch Tongue	4,006'	Oil
Uteland Limestone	4,336'	Oil
Wasatch	4,496'	Gas
Chapita Wells	5,396'	Gas
Uteland Buttes	6,596'	Gas
Mesaverde	7,695'	Gas

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.

<u>Type</u>	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Conn.</u>	<u>Top</u>	<u>Bottom</u>	<u>Hole</u>
Surface	8-5/8"	32.0 ppf	J-55	STC	0'	2,000'	12-1/4"
Production	5-1/2"	17.0 ppf	MAV-80	LTC	0'	8,200'	7-7/8"

Note: The drilled depth of the surface hole and the setting depth of the surface casing may vary from 1,700' to 2,000'. Should a lost circulation zone be encountered while drilling, casing will be set approximately 300' below the lost circulation zone. If no lost circulation zone is encountered, casing to be set at 2,000'±.

DRILLING PLAN

APPROVAL OF OPERATIONS

5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

Surface hole: No BOPE will be utilized. Air foam mist, rotating head and diverter system will be utilized.

Production hole: Prior to drilling out the surface casing shoe, 3,000 psi or greater BOP equipment will be installed. The pipe rams will be operated at least once per day from intermediate casing to total depth. The blind rams will be tested once per day from intermediate casing to total depth if operations permit.

A diagram of the planned BOP equipment for normal drilling operations in this area is attached. As denoted there will be two valves and one check valve on the kill line, two valves on the choke line, and two adjustable chokes on the manifold system. The BOP "stack" will consist of two BOP rams (1 pipe, 1 blind) and one annular type preventer, all rated to a minimum of 3,000 psi working pressure.

The BOP equipment will be pressure tested prior to drilling below the intermediate casing shoe. All test pressures will be maintained for fifteen (15) minutes without any significant pressure decrease. Clear water will be circulated into the BOP stack and lines prior to pressure testing. The following test pressures will be used as a minimum for various equipment items.

1.	Annular BOP	1,500 psi
2.	Ram type BOP	3,000 psi
3.	Kill line valves	3,000 psi
4.	Choke line valves and choke manifold valves	3,000 psi
5.	Chokes	3,000 psi
6.	Casing, casinghead & weld	1,500 psi
7.	Upper kelly cock and safety valve	3,000 psi
8.	Dart valve	3,000 psi

6. MUD SYSTEMS

- An air or an air/mist system may be used to drill to drill the surface hole until water influx becomes too great.
- KCL mud system will be used to drill well.

<u>Depths</u>	<u>Mud Weight (ppg)</u>	<u>Mud System</u>
0' - 2,000'	8.4	Air foam mist, rotating head and diverter
2,000' - 8,200'	8.6	Fresh water/2% KCL/KCL mud system

7. BLOOIE LINE

- An automatic igniter will not be installed on blooie line. The blooie will have a constant ignition source.
- A "target tee" connection will be installed on blooie line for 90° change of directions for abrasion resistance.
- "Target tee" connections will be a minimum of 50' from wellhead.
- The blooie line discharge will be a minimum of 100' from the wellhead.

8. AUXILIARY EQUIPMENT TO BE USED

- a. Kelly cock.
- b. Full opening valve with drill pipe connection will be kept on floor. Valve will be used when the kelly is not in string.

9. TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED

- A drillstem test in the Wasatch Tongue is possible.
- One electric line wire-log will be run from total depth to surface casing.
- The gamma ray will be left on to record from total depth to surface casing.
- Other log curves (resistivities, porosity, and caliper) will record from total depth to surface casing.
- A dipmeter, percussion cores, or rotary cores may be run over selected intervals.

10. ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED

- Expected BHP 1,500-2,000 psi (lower than normal pressure gradient).
- No abnormal temperature or pressures are anticipated.
- The formations to be penetrated do not contain known H₂S gas.

DRILLING PLAN

APPROVAL OF OPERATIONS

11. WATER SUPPLY

- No water pipelines will be laid for this well.
- No water well will be drilled for this well.
- Drilling water for this will be hauled on the road(s) shown in Attachment No. 3.
- Water will be hauled from: Water Permit # 43-10447 Section 9, Township 8 South, Range 20 East

12. CEMENT SYSTEMS

a. Surface Cement:

- Drill 12-1/4" hole to 2,000'±, run and cement 8-5/8" to surface (depth to vary based on depth of lost circulation zone).
- Pump 20 bbls lightly weighted water spacer followed by 5 bbls fresh water. Displace with any available water.
- Casing to be run with: a) guide shoe b) insert float c) three (3) centralizers, one on each of first 3 joints d) stop ring for plug two joints off bottom e) bottom three joints thread locked f) pump job with bottom plug only.
- Cement the casing annulus to surface. Top out jobs to be performed if needed. Depending to depth of top of cement in the annulus, a 1" tubing string may or may not be utilized.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	252	0'-1,500'	11.0 ppg	3.82 CFS	619 CF	835 CF	35%
Tail	219	1,500'-2,000'	15.6 ppg	1.18 CFS	220 CF	297 CF	35%
Top Out	100	0'-200'	15.6 ppg	1.18 CFS	95 CF	118 CF	24% (if required)

Lead Mix: Premium Plus V blend. Blend includes Class "G" cement, gel, salt, gilsonite.
Slurry yield: 3.82 cf/sack Slurry weight: 11.00 #/gal.
Water requirement: 22.95 gal/sack

Tail Mix: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
Slurry yield: 1.18 cf/sack Slurry weight: 15.60 #/gal.
Water requirement: 5.2 gal/sack

Top Out: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
Slurry yield: 1.18 cf/sack Slurry weight: 15.60 #/gal.
Water requirement: 5.2 gal/sack

c. Production Casing Cement:

- Drill 7-7/8" hole to 8,200'±, run and cement 5 1/2".
- Cement interface is at 4,000', which is typically 500'-1,000' above shallowest pay.
- Pump 20 bbl Mud Clean II unweighted spacer, followed by 20 Bbls fresh H2O spacer.
- Displace with 3% KCL.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	160	3,700'-4,700'	11.5 ppg	3.12 CFS	175 CF	350 CF	100%
Tail	435	4,700'-8,200'	13.0 ppg	1.75 CFS	473 CF	946 CF	100%

Note: A caliper log will be ran to determine cement volume requirements.

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
Slurry yield: 3.12 cf/sack Slurry weight: 11.60 #/gal.
Water requirement: 17.71 gal/sack
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Halliburton HLC blend (Prem Plus V/JB flyash). Blend includes Class "G" cement, KCl, EX-1, Halad 322, & HR-5.
Slurry yield: 1.75 cf/sack Slurry weight: 13.00 #/gal.
Water requirement: 9.09 gal/sack
Compressives @ 165°F: 905 psi after 24 hours

13. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS

Starting Date: May 15, 2005
Duration: 14 Days

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

009

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

CONFIDENTIAL

2. Name of Operator

Dominion Exploration & Production, Inc.

3a. Address Suite 600
14000 Quail Springs Parkway, OKC, OK 73134

3b. Phone No. (include area code)
(405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1730' FNL & 2055' FWL, SE/NW Sec. 26-10S-19E

5. Lease Serial No.

UTU-43156

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Wild Horse Bench 6-26E

9. API Well No.

43-047-34985

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	APD Expiration.
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen, directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

The state APD for this well expires May 25, 2005. Dominion is hereby requesting a one year extension.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 05-08-05

By: [Signature]

COPY SENT TO OPERATOR

Date: 5-9-05

Initials: [Signature]

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

[Signature: Carla Christian]

Date 05/02/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

MAY 06 2005

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-34985
Well Name: WHB 6-26E
Location: Section 26-10S-19E, 1730' FNL & 2055' FWL
Company Permit Issued to: Dominion Exploration & Production, Inc.
Date Original Permit Issued: 5/28/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Cara Christian
Signature

5/3/2005

Date

Title: Regulatory Specialist

Representing: Dominion Exploration & Production, Inc.

RECEIVED

MAY 06 2005

DIV. OF OIL, GAS & MINING

CONFIDENTIAL

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: DOMINION EXPL & PROD INC

Well Name: WHB 6-26E

Api No: 43-047-34985 Lease Type: FEDERAL

Section 26 Township 10S Range 19E County UINTAH

Drilling Contractor BILL JR'S RIG # 6

SPUDDED:

Date 08/13/05

Time 6:00 PM

How DRY

Drilling will Commence: _____

Reported by PAT WISENER

Telephone # 1-435-828-1455 OR 435-823-1890

Date 08/16/2005 Signed CHD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

RECEIVED
AUG 18 2005
DIV. OF OIL, GAS & MINING

FORM 6

ENTITY ACTION FORM

Operator: Dominion Exploration & Production, Inc. Operator Account Number: N 1095
Address: 14000 Quail Springs Parkway, Suite 600
city Oklahoma City
state Ok zip 73134 Phone Number: (405) 749-1300

Well 1

API Number	Well Name	QQ	Sec	Twp	Rng	County
43-047-34985	Wild Horse Bench 6-26E	SE	NW	26	10S	19E
						Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
A	99999	14886	8/13/2005		8/25/05	
Comments: <u>MVRD</u> <div style="float: right; font-size: 1.5em; font-weight: bold;">CONFIDENTIAL</div>						

Well 2

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
Comments:						

Well 3

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
Comments:						

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Carla Christian

Name (Please Print)

Carla Christian

Signature

Regulatory Specialist

8/16/2005

Title

Date

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
**Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.**

SUBMIT IN DUPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Confidential
Dominion Exploration & Production, Inc.

3a. Address Suite 600
14000 Quail Springs Parkway, OKC, OK 73134

3b. Phone No. (include area code)
(405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1730' FNL & 2055' FWL, SE/NW Sec. 26-10S-19E

5. Lease Serial No.

UTU-43156

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Wild Horse Bench 6-26E

9. API Well No.

43-047-34985

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Well
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Spud well 8/13/05. Ran 52 jts. 8 5/8", 32#, J-55, ST&C csg., set @ 2210'. Cemented lead w/250 sks V, 11.0 ppg, 3.82 yld, tailed w/225 sks G, 15.8 ppg, 1.15 yld., top off w/200 sks G mixed @ 15.8 ppg, 1.15 yld, 15 bbls to surface. WODR.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

Carla Christian

Date 08/24/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

AUG 29 2005

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
**Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.
43156

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Wild Horse Bench 6-26E

9. API Well No.

43-047-34985

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Acidize

☐ Altering Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☐ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity

☒ Other

APD Expiration.

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen, directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

The state APD for this well expires May 25, 2005. Dominon is hereby requesting a one year extension.

RECEIVED

SEP 12 2005

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

Carla Christian

Date 05/02/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date AUG 03 2005

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UDOGM

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-34985
Well Name: WHB 6-26E
Location: Section 26-10S-19E, 1730' FNL & 2055' FWL
Company Permit Issued to: Dominion Exploration & Production, Inc.
Date Original Permit Issued: 5/28/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Caleb Christian
Signature

5/3/2005
Date

Title: Regulatory Specialist

Representing: Dominion Exploration & Production, Inc.

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 12/7/2005 at 3:16:18 PM

Pages : 2 (including Cover)

Subject : WHB 6-26E *T10S R19E S-26* *43-047-34985*

CONFIDENTIAL

RECEIVED

DEC 07 2005

UTAH DIVISION OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

CONFIDENTIAL

WELL NAME : WHB 6-26E

Event No: 1

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

LOCATION : 1730' FNL 2055' FWL SEC 26 T 10S R 19E

COUNTY & STATE : UTAH

UT

CONTRACTOR :

WI % : 100.00 AFE # : 0401786

API # : 43-04734985

PLAN DEPTH : 8,200 SPUD DATE : 08/13/05

DHC : \$401,500

CWC : \$563,500

AFE TOTAL : \$965,000

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$620,726.59

EVENT CC : \$12,320.00

EVENT TC : \$633,046.59

WELL TOTL COST : \$640,139

REPORT DATE: 11/30/05 MD : 8,302 TVD : 8,302 DAYS : 8 MW : 8.9 VISC : 37
 DAILY : DC : \$107,325.00 CC : \$0.00 TC : \$107,325.00 CUM : DC : \$441,007.00 CC : \$0.00 TC : \$441,007.00
 DAILY DETAILS : DRLG F/ 7699 TO 8302 RIG SERVICE DRLG F/ 7985 TO 8302 CIRC F/ LOGS TOOH F/ LOGS

REPORT DATE: 12/01/05 MD : 8,302 TVD : 8,302 DAYS : 9 MW : 9 VISC : 38
 DAILY : DC : \$29,825.00 CC : \$0.00 TC : \$29,825.00 CUM : DC : \$470,832.00 CC : \$0.00 TC : \$470,832.00
 DAILY DETAILS : LOGGING TO 8308 TIH CUT DRLG LINE TIH CIRC TOOH L/D DP RU CSG CREW RUN 5 1/2 PROD CSG

REPORT DATE: 12/02/05 MD : 8,302 TVD : 8,302 DAYS : 10 MW : VISC :
 DAILY : DC : \$149,894.59 CC : \$0.00 TC : \$149,894.59 CUM : DC : \$620,726.59 CC : \$0.00 TC : \$620,726.59
 DAILY DETAILS : RUN 193 JTS AND 2 MKR JTS OF 5 1/2 17# M-80 LT&C 8RD CSG TO 8258.54' KB HIT BRIDGE @ 8150 AND
 WASHED TO BTM CIRC AND RD CSG CREW AND RU CEMENTERS CEMENT W/ 63 SKS OF HIFULLV W/ 16%
 GEL, .6% EX-1, 3% SALT, 1% HR-7, 1/4#/SK FLOCELE, 10#/SK GILSONITE, 17.83 GAL WATER/SK, 3.12 CUFT/SK,
 11.6 PPG, FOLLOWED BY 600 SKS OF HLC TYPE V W/ 3% GEL, 3%KCL, 1% EX-1, .6% HALAD-322, .2% HR-5, 8.81
 GAL WATER/SK, 1.69 CUFT/SK, 13 PPG, BUMPED PLUG W/ 1850 PSI FLOATS HELD, RD CEMENT HEAD AND
 RELEASE CEMENTERS ND BOPE AND CLEAN PITS
 RELEASE RIG @ 20:00 12-1-2005 RIGGING DOWN

REPORT DATE: 12/07/05 MD : 8,302 TVD : 8,302 DAYS : 0 MW : VISC :
 DAILY : DC : \$0.00 CC : \$12,320.00 TC : \$12,320.00 CUM : DC : \$620,726.59 CC : \$12,320.00 TC : \$633,046.59
 DAILY DETAILS : Install frac head assy. Pressure test csqn and frac head to 5,000 psi for 30 mins. Rig up Schlumberger and run bond log
 from 8206' to est cement top @ 2550'. Perforate first stage @ 8074-90' & 8121-24', & 8186-89'. All @ 3 JSPF. Total of
 22' of zone & 69 holes. Wait on frac date.

URGENT

DEC 07 2005

UTAH DIVISION OF OIL, GAS & MINING

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 12/14/2005 at 3:32:08 PM

Pages : 2 (including Cover)

Subject : WHB 6-26E *T10S R19E S-26 43-047-34985*

CONFIDENTIAL

RECEIVED

DEC 14 2005

DIV. OF OIL, GAS & MINING

**WELL CHRONOLOGY REPORT****CONFIDENTIAL****WELL NAME : WHB 6-26E**

Event No: 1

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

LOCATION : 1730' FNL 2055' FWL SEC 26 T 10S R 19E

COUNTY & STATE : UTAH

UT

CONTRACTOR :

WI % : 100.00 AFE # : 0401786

API # : 43-04734985

PLAN DEPTH : 8,200 SPUD DATE : 08/13/05

DHC : \$401,500

CWC : \$563,500

AFE TOTAL : \$965,000

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$620,726.59

EVENT CC : \$12,320.00

EVENT TC : \$633,046.59

WELL TOTL COST : \$640,139

REPORT DATE: 12/07/05

MD : 8,302

TVD : 8,302

DAYS : 0

MW :

VISC :

DAILY : DC : \$0.00

CC : \$12,320.00

TC : \$12,320.00

CUM : DC : \$620,726.59

CC : \$12,320.00

TC : \$633,046.59

DAILY DETAILS : Install frac head assy. Pressure test csqn and frac head to 5,000 psi for 30 mins. Rig up Schlumberger and run bond log from 8206' to est cement top @ 2550'. Perforate first stage @ 8074-90' & 8121-24', & 8186-89'. All @ 3 JSPF. Total of 22' of zone & 69 holes. Wait on frac date.

RECEIVED**DEC 14 2005**

DIV. OF OIL, GAS & MINING

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 12/21/2005 at 1:35:48 PM

Pages : 3 (including Cover)

Subject : WHB 6-26E *T10S R19E S-26*

43-047-34985

CONFIDENTIAL

RECEIVED

DEC 21 2005

DIV. OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

CONFIDENTIAL

WELL NAME : WHB 6-26E

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 1730' FNL 2055' FWL SEC 26 T 10S R 19E

COUNTY & STATE : UTAH

UT

CONTRACTOR :

WM % : 100.00 AFE # : 0401786

API # : 43-04734985

PLAN DEPTH : 8,200

SPUD DATE : 08/13/05

DHC : \$401,500

CWC : \$563,500

AFE TOTAL : \$965,000

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$620,726.59

EVENT CC : \$197,547.00

EVENT TC : \$818,273.59

WELL TOTL COST : \$926,846

REPORT DATE: 12/07/05

MD : 8,302

TVD : 8,302

DAYS : 0

MW :

VISC :

DAILY : DC : \$0.00

CC : \$12,320.00

TC : \$12,320.00

CUM : DC : \$620,726.59

CC : \$12,320.00

TC : \$633,046.59

DAILY DETAILS : Install frac head assy. Pressure test csqn and frac head to 5,000 psi for 30 mins. Rig up Schlumberger and run bond log from 8206' to est cement top @ 2550'. Perforate first stage @ 8074-90' & 8121-24', & 8186-89'. All @ 3 JSPF. Total of 22' of zone & 69 holes. Wait on frac date.

REPORT DATE: 12/16/05

MD : 8,302

TVD : 8,302

DAYS : 14

MW :

VISC :

DAILY : DC : \$0.00

CC : \$185,227.00

TC : \$185,227.00

CUM : DC : \$620,726.59

CC : \$197,547.00

TC : \$818,273.59

DAILY DETAILS : FRAC STAGE #3, PERFORATE AND FRAC STAGES #4 & #5. TURN WELL OVER TO PRODUCTION. 12-15-2005, WHB 6-26E. MIRU SCHLUMBERGER frac equipment, tested lines to 7000 psi. Held safety meeting with all personnel. Quality control on gel & breaker systems with on-site lab was verified. Frac'd Wasatch Interval # 3, 7438-42', 7457-62', 6 spf, 56 holes, with 51,233# 20/40 Ottawa sand, screened out w/ 39,919# of sand in formation, and 11,314# in the well bore. Pumped frac at an average rate of 22.6 bpm, using 184 mscf of N2 and 541 bbls of fluid. Average surface treating pressure was 3631 psi with sand concentrations stair stepping from 2.0 ppg to 6.0 ppg.

2796 gallons Pad YF120ST/N2 gel.

2288 gallons YF120ST/N2 pumped @ 2.0 ppg sand concentration.

2162 gallons YF120ST/N2 pumped @ 3.0 ppg sand concentration.

2115 gallons YF120ST/N2 pumped @ 4.0 ppg sand concentration.

2120 gallons YF120ST/N2 pumped @ 5.0 ppg sand concentration.

1898 gallons YF120ST/N2 pumped @ 6.0 ppg sand concentration.

4732 gallons WF110 slick water flush.

Total frac fluid pumped 541 bbls. N2 was cut during flush. Opened well to the pit on a 24/64 chke for 2 hours in an attempt to flow the sand out of the well bore. Shut well for 30 minutes to settle the remaining sand in the well bore. Ru wire line, RIH and set 5K frac plug @ 7200'. RIH and perforate interval #4 @ 6636-39', 6663-66', 6739-51', 3 spf, 57 holes. Fraced interval #4 w/ 56,548# 20/40 Ottawa sand. Pumped frac at an avg rate of 28.4 bpm, using 200.9 mscf of N2 and 580 bbls of fluid. Avg surface treating pressure was 3543 psi w/ sand concentrations stair stepping from 2.0 ppg to 6.0 ppg.

4191 gallons Pad YF120ST/N2 gel.

2103 gallons YF120ST/N2 pumped @ 2.0 ppg sand concentration.

2110 gallons YF120ST/N2 pumped @ 3.0 ppg sand concentration.

2811 gallons YF120ST/N2 pumped @ 4.0 ppg sand concentration.

2122 gallons YF120ST/N2 pumped @ 5.0 ppg sand concentration.

1565 gallons YF120ST/N2 pumped @ 6.0 ppg sand concentration.

6298 gallons WF110 slick water flush.

Total frac fluid pumped 580 bbls. N2 was cut during flush. RIH and set 5K frac plug @ 6130', perforate interval # 5 @ 5996-6005', 6 spf, 55 holes. Fraced interval #5 w/ 22,232# 20/40 Ottawa sand. Pumped frac at an avg rate of 16.8 bpm, using 134.3 mscf of N2 and 282 bbls of fluid. Avg surface treating pressure was 2288 psi w/ sand concentrations stair stepping from 2.0 ppg to 5.0 ppg.

2796 gallons Pad YF115ST/N2 gel.

1405 gallons YF115ST/N2 pumped @ 2.0 ppg sand concentration.

1286 gallons YF115ST/N2 pumped @ 4.0 ppg sand concentration.

1707 gallons YF115ST/N2 pumped @ 5.0 ppg sand concentration.

4270 gallons WF110 slick water flush.

Total frac fluid pumped 282 bbls. N2 was not cut during flush. Opened well to the pit on a 12/64 choke. Turned well over to production.

REPORT DATE: 12/17/05

MD : 8,302

TVD : 8,302

DAYS : 15

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$620,726.59

CC : \$197,547.00

TC : \$818,273.59

DAILY DETAILS : FLOW REPORT OPEN WELL TO PIT ON 12/64 CHOKE AT 5:30 PM FCP 2250 PSI. TOTAL FRAC FLUID PUMPED 2965 BBLs

RECEIVED

DEC 21 2005



WELL CHRONOLOGY REPORT

WELL NAME : WHB 6-26E

Event No: 1

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

LOCATION : 1730' FNL 2055' FWL SEC 26 T 10S R 19E

COUNTY & STATE : UTAH

UT

CONTRACTOR :

WM % : 100.00 AFE # : 0401786

API # : 43-04734985

PLAN DEPTH : 8,200 SPUD DATE : 08/13/05

DHC : \$401,500

CWC : \$563,500

AFE TOTAL : \$965,000

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$620,726.59

EVENT CC : \$197,547.00

EVENT TC : \$818,273.59

WELL TOTL COST : \$926,846

REPORT DATE: 12/18/05

MD : 8,302

TVD : 8,302

DAYS : 16

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$620,726.59

CC : \$197,547.00

TC : \$818,273.59

DAILY DETAILS : FLOW REPORT WELL FLOWING TO PIT ON 12/64 CHOKE FCP 500, RETURNING LARGE AMOUNTS OF FRAC FLUID CHANDE TO 18/64 CHOKE & LEFT OPEN TO PIT EST. RECOVERED 490 BBLS FRAC FLUID.

REPORT DATE: 12/19/05

MD : 8,302

TVD : 8,302

DAYS : 17

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$620,726.59

CC : \$197,547.00

TC : \$818,273.59

DAILY DETAILS : FLOW REPORT FCP 1000 18/64 CHOKE TO PIT GAS CLEAN & WLL BURN RU FLOW LINE & TURN TO SALES EST. RECOVERED 798 BBLS FRAC FLUID

REPORT DATE: 12/20/05

MD : 8,302

TVD : 8,302

DAYS : 18

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$620,726.59

CC : \$197,547.00

TC : \$818,273.59

DAILY DETAILS : FLOW REPORT WELL FLOWING TO PIT ON 18/64 CHOKE FCP 1000 RECOVERED 798 BBLS FLUID RU FLOWLINE TURN TO SALES @ 9 AM ON 18/64 CHOKE EST. RATE 1500 MSCF.

REPORT DATE: 12/21/05

MD : 8,302

TVD : 8,302

DAYS : 19

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$620,726.59

CC : \$197,547.00

TC : \$818,273.59

DAILY DETAILS : FLOW REPORT MADE 1013 MCF, FCP 1111, SLP 84, 8 OIL, 395 WTR. 18/64 CHOKE 18 HRS. PROD.

RECEIVED

DEC 21 2005

DIV. OF OIL, GAS & MINING

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 12/28/2005 at 12:57:00 PM

Pages : 2 (including Cover)

Subject : WHB 6-26E

T10S R19E S-26 43-042-34985

CONFIDENTIAL

RECEIVED

DEC 28 2005

DIV. OF OIL, GAS & MINING

Page: 1



WELL CHRONOLOGY REPORT

CONFIDENTIAL

WELL NAME : WHB 6-26E

DISTRICT: WESTERN

FIELD: NATURAL BUTTES 630
UT

Event No: 1

LOCATION: 1730' FNL 2055' FWL SEC 26 T 10S R 19E

COUNTY & STATE: UTAH

CONTRACTOR:

WI %: 100.00 AFE #: 0401786

API #: 43-04734985

PLAN DEPTH: 8,200 SPUD DATE: 08/13/05

DHC: \$401,500

CWC: \$563,500

AFE TOTAL: \$965,000

FORMATION: WASATCH/MESAVERDE

EVENT DC: \$620,726.59

EVENT CC: \$197,547.00

EVENT TC: \$818,273.59

WELL TOTL COST: \$926,846

REPORT DATE: 12/21/05

MD: 8,302

TVD: 8,302

DAYS: 19

MW:

VISC:

DAILY: DC: \$0.00

CC: \$0.00

TC: \$0.00

CUM: DC: \$620,726.59

CC: \$197,547.00

TC: \$818,273.59

DAILY DETAILS: FLOW REPORT MADE 1013 MCF, FCP 1111, SLP 84, 8 OIL, 395 WTR. 18/64 CHOKE 18 HRS. PROD.

REPORT DATE: 12/22/05

MD: 8,302

TVD: 8,302

DAYS: 20

MW:

VISC:

DAILY: DC: \$0.00

CC: \$0.00

TC: \$0.00

CUM: DC: \$620,726.59

CC: \$197,547.00

TC: \$818,273.59

DAILY DETAILS: FLOW REPORT MADE 1347 MCF FCP 1302, SLP 62, 3 OIL, 15 WTR. 18/64 CHOKE LEFT WELL SAME.

REPORT DATE: 12/23/05

MD: 8,302

TVD: 8,302

DAYS: 21

MW:

VISC:

DAILY: DC: \$0.00

CC: \$0.00

TC: \$0.00

CUM: DC: \$620,726.59

CC: \$197,547.00

TC: \$818,273.59

DAILY DETAILS: FLOW REPORT MADE 1103 MCF, FCP 1450, SLP 68, 5 OIL, 22 WTR. 18/64 CHOKE LEFT WELL SAME.

RECEIVED

DEC 28 2005

DIV. OF OIL, GAS & MIN.

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 1/4/2006 at 2:44:24 PM

Pages : 2 (including Cover)

Subject : WHB 6-26E *T10S R19E S-26 43-042-34985*

CONFIDENTIAL

RECEIVED

JAN 04 2006

DIV. OF OIL, GAS & MINING

**WELL CHRONOLOGY REPORT****WELL NAME : WHB 6-26E**

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 1730' FNL 2055' FWL SEC 26 T 10S R 19E

COUNTY & STATE : UINTAH

UT

CONTRACTOR :

VI % : 100.00 AFE # : 0401786

API # : 43-04734985

PLAN DEPTH : 8,200

SPUD DATE : 08/13/05

DHC : \$401,500

CWC : \$563,500

AFE TOTAL : \$965,000

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$620,726.59

EVENT CC : \$197,547.00

EVENT TC : \$818,273.59

WELL TOTL COST : \$926,846

REPORT DATE: 12/22/05

MD : 8,302

TVD : 8,302

DAYS : 20

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$620,726.59

CC : \$197,547.00

TC : \$818,273.59

DAILY DETAILS : FLOW REPORT MADE 1347 MCF FCP 1302, SLP 62, 3 OIL, 15 WTR. 18/64 CHOKE LEFT WELL SAME.

REPORT DATE: 12/23/05

MD : 8,302

TVD : 8,302

DAYS : 21

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$620,726.59

CC : \$197,547.00

TC : \$818,273.59

DAILY DETAILS : FLOW REPORT MADE 1103 MCF, FCP 1450, SLP 68, 5 OIL, 22 WTR. 18/64 CHOKE LEFT WELL SAME.

RECEIVED**JAN 04 2006**

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPlicate - Only Instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Dominion Exploration & Production, Inc.

3a. Address

Suite 600

14000 Quail Springs Parkway, OKC, OK 73134

3b. Phone No. (include area code)

(405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1730' FNL & 2055' FWL, SE/NW Sec. 26-10S-19E

5. Lease Serial No.

UTU-43156

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Wild Horse Bench 6-26E

9. API Well No.

43-047-34985

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Drilling Operations
<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

12/01/05 ran 193 jts. 5 1/2", 17#, M-80, LT&C 8rd csg., set @ 8259'. Cemented lead w/63 sks Hi-Fill "V", 3.12 cuft/sk, 11.6 ppg, tailed w/600 sks HLC Type V, 1.69 cuft/sk, 13.0 ppg, bump plug, floats held, RD. 12/15/05 perf'd & frac'd well. First sales 12/18/05.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

Carla Christian

Date 01/05/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

JAN 10 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED

OMB No. 1004-0135

Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.**SUBMIT IN TRIPLICATE - Other Instructions on reverse side**

1. Type of Well

☐

Oil Well

☒

Gas Well

☐

Other

2. Name of Operator

Dominion Exploration & Production, Inc.

3a. Address

Suite 600

14000 Quail Springs Parkway, OKC, OK 73134

3b. Phone No. (include area code)

(405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1730' FNL & 2055' FWL, SE/NW Sec. 26-10S-19E

5. Lease Serial No.

UTU-43156

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Wild Horse Bench 6-26E

9. API Well No.

43-047-34985

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION

☒

Notice of Intent

☐

Subsequent Report

☐

Final Abandonment Notice

TYPE OF ACTION

☐

Acidize

☐

Deepen

☐

Production (Start/Resume)

☐

Water Shut-Off

☐

Altering Casing

☐

Fracture Treat

☐

Reclamation

☐

Well Integrity

☐

Casing Repair

☐

New Construction

☐

Recomplete

☒

Other

☐

Change Plans

☐

Plug and Abandon

☐

Temporarily Abandon

☐

Down Hole Commingle

☐

Convert to Injection

☐

Plug Back

☐

Water Disposal

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen, directionally or recomplete, horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Dominion request permission to commingle production downhole within the Mesaverde & Wasatch formation
(See attached schematic for detail).

Based on net pay calculations/volumetrics for the well, and production history in the Riverbend Unit, the production is 32% Wasatch and 68% Mesaverde.

The working interest is shared with EOG, the overriding and royalty interest owners in the proposed pools are identical, a copy of this application has been mailed to EOG.

A copy of this application has been sent to the owners in the contiguous leases.

COPIES SENT TO OPERATOR
DATE: 3-15-06
INITIALS: CHD

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

Carla Christian

Date 02/15/2006

THIS SPACE FOR FEDERAL OR STATE OFFICIAL USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Accepted
Utah Division of
Oil, Gas and Mining
Office
Date: 3/14/06
BY: *[Signature]*

Date


General Approval of This
Action Is Necessary

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

FEB 21 2006

DIV. OF OIL, GAS & MINING

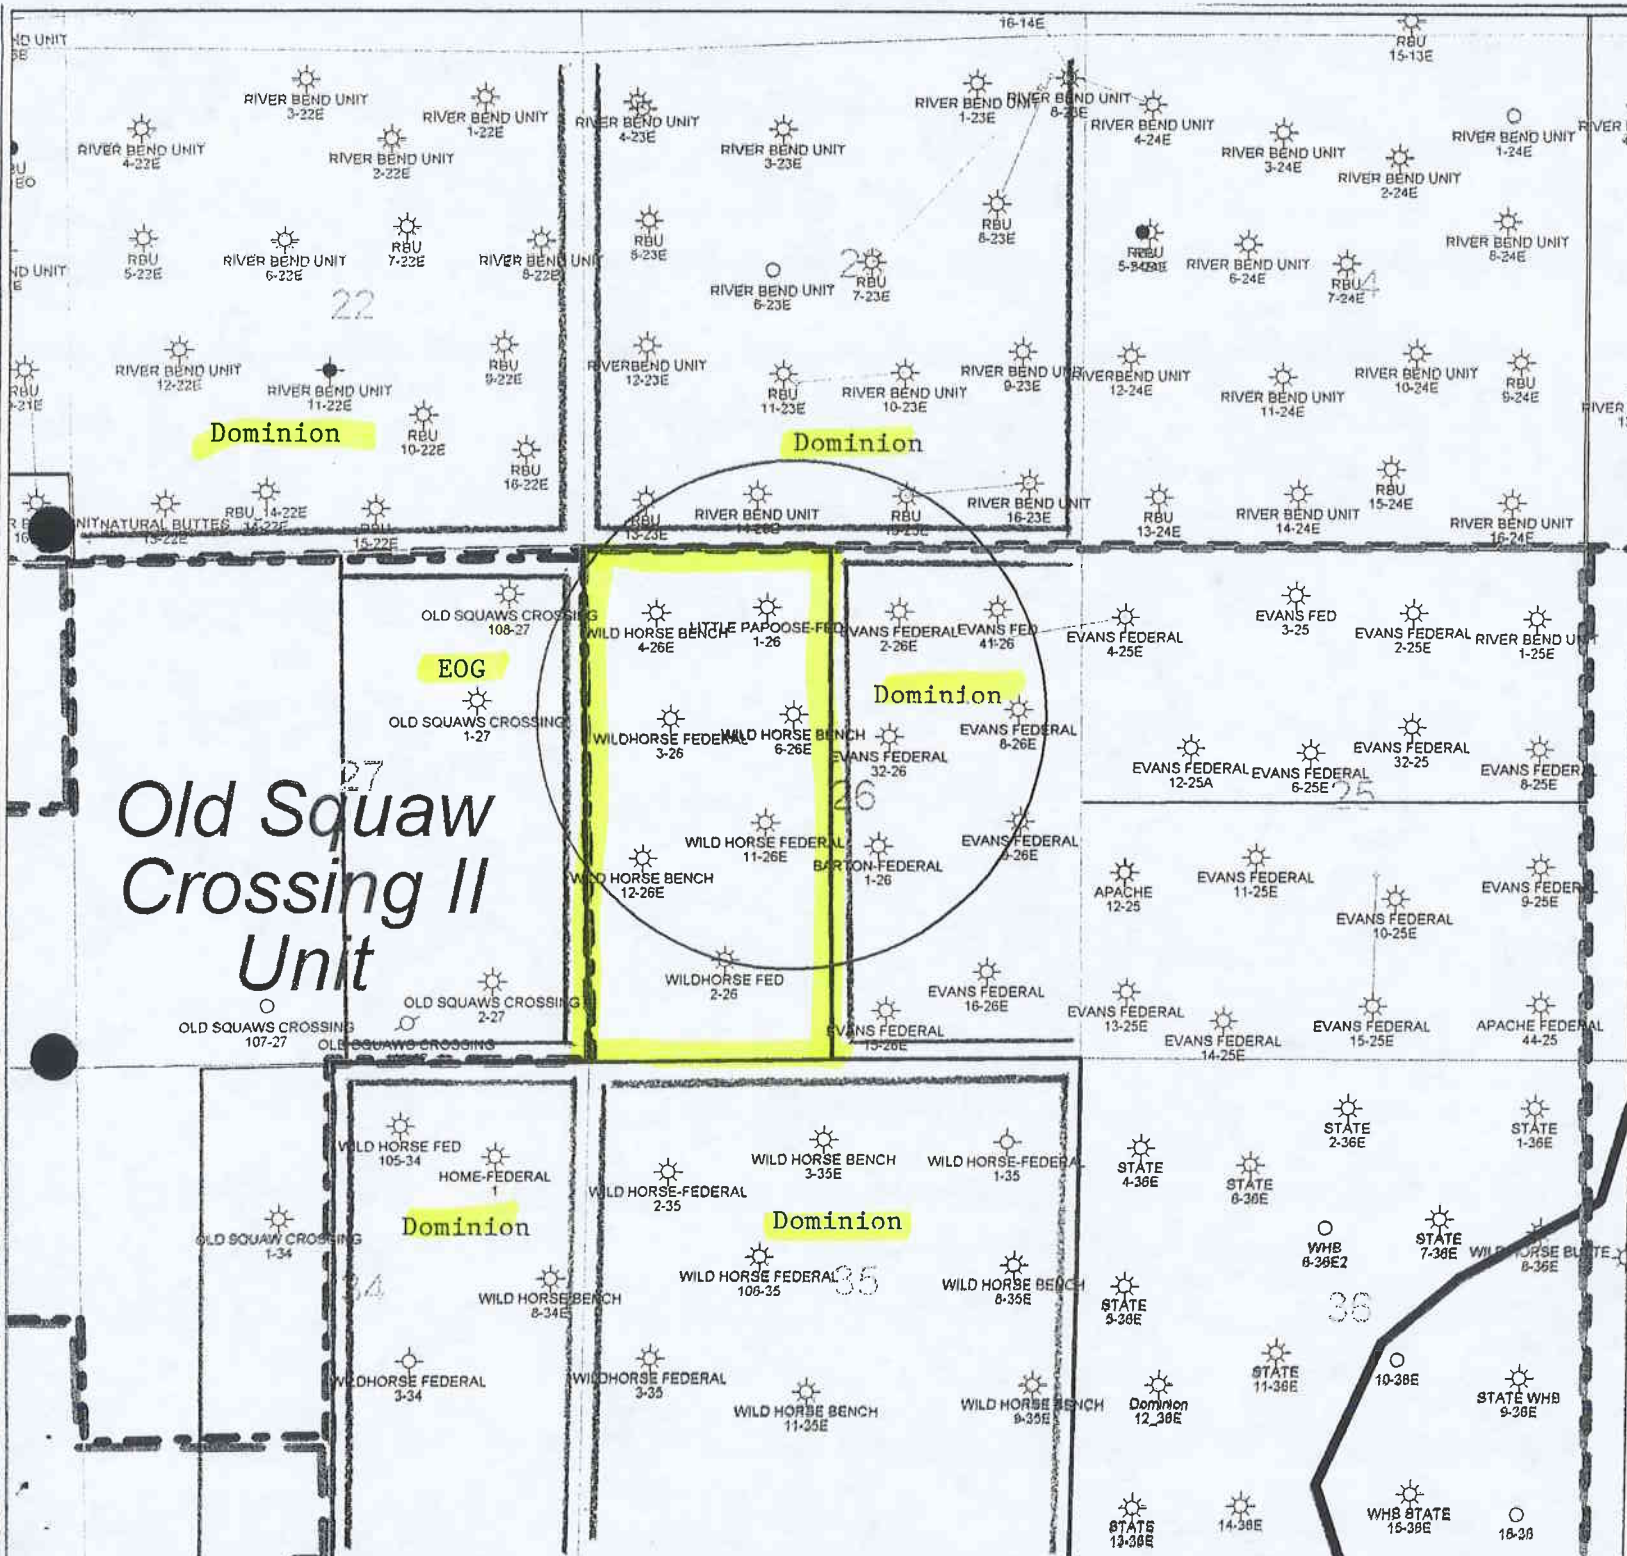

RECEIVED
FEB 21 2006
DIV. OF OIL, GAS & MINING



Dominion

WHB 6-26E

SECTION 26 - T10S - R19E
UINTAH COUNTY, UTAH



POSTED WELL DATA

Well Name
Well Number

WHB 6-26E

2055' FWL, 1730' FNL
Sec. 26-10S-19E
Uintah Co., Utah
API No. 43-047-34985
Property No. WUT329650
5286' GL 5304' KB

KB = 18'

CONDUCTOR

SURFACE CASING
8-5/8" 32# J-55 @ 2210'

TOC (Bond Log) @ 2550'

TUBING STRING
2-3/8" 4.7# J55 @ 8189'

PRODUCTION CASING
5-1/2" 17# M80 @ 8258'

Spud Date: 8/13/2005
Rig Release: 12/1/2005
First Sales: 12/18/05

Wasatch Perfs (top @ 4502')

5996' -6005' 6 spf 9 ft 55 holes
6636' -6639' 3 spf 3 ft 10 holes
6663' -6666' 3 spf 3 ft 10 holes
6739' -6751' 3 spf 12 ft 37 holes
7438' -7442' 6 spf 4 ft 25 holes
7457' -7462' 6 spf 5 ft 31 holes

Mesaverde Perfs (top @ 7472')

7894' -7904' 2 spf 10 ft 21 holes
7906' -7908' 2 spf 2 ft 5 holes
7912' -7918' 2 spf 6 ft 13 holes
7994' -8004' 2 spf 10 ft 21 holes
8010' -8013' 2 spf 3 ft 7 holes
8074' -8090' 3 spf 16 ft 49 holes
8121' -8124' 3 spf 3 ft 10 hole
8186' -8189' 3 spf 3 ft 10 holes

PBTD: 8213'

TD: 8302'

As of
2/13/06:ls

Volumetric Recoverable Reserves

WDC 02/2003

Well Name **WHB 6-26E**

Zone: WASATCH/MESAVERDE

Well Total Depth: 8302

Bottom Hole Temperature: 152

LAS File Name: C:\LOGS\whb 6-26e\10973489_DOMINION_WHB 6-26E_PEX-HRLA MAIN 007LUP.las

Recoverable Gas (EUR):	1,271,457	Mcf
BP Recoverable Gas (EUR):		Mcf
Total Recoverable Gas (EUR):	1,271,457	Mcf

	<u>TOP</u>	<u>% EUR</u>
WASATCH	4502	329.
MESAVERDE	7472	689.

Individual Interval Reserve Information

Interval	Top of Interval	Bot. of Interval	Thickness h, ft	Porosity %	Avg. Res. ohm-m	Avg. Sw %	HPV PorFt	Gas Gravity	Temp, F	BHPres psia	Extent Acres	Int. EUR Mmcf	BHPab psia	Averages ? Y/N	Int. EUR Mmcf
1	8186	8189	2.5	8.4	135	40.7	0.12	0.6	150.7	3290	40	45.075	132.5	y	45.06
2	8121	8124	3	9.2	62.3	54.4	0.13	0.6	149.9	3249	40	45.149	132.4	y	45.15
3	8074	8090	16	7.1	240.4	35.6	0.73	0.6	149.5	3232.8	40	261.565	132.3	y	261.57
4	8010	8013	3	7.9	180.3	37.3	0.15	0.6	148.7	3204.6	40	52.831	132.1	y	52.83
5	7994	8004	10	6.8	170.2	43.9	0.38	0.6	148.6	3199.6	40	135.472	132.1	y	135.47
6	7912	7918	6	8.8	163.2	35.2	0.34	0.6	147.6	3166	40	120.686	131.9	y	120.69
7	7906	7908	2	9.1	133.5	37.8	0.11	0.6	147.6	3162.8	40	39.894	131.9	y	39.89
8	7894	7904	9.5	8.3	146.3	39.2	0.48	0.6	147.5	3159.6	40	168.84	131.9	y	168.84
9	7458	7462	4	9	73.5	51.4	0.17	0.6	142.6	2984	40	59.274	130.9	y	59.27
10	6739	6751	12	9.4	85.4	45.5	0.62	0.6	134.7	2698	40	193.452	129.4	y	193.45
11	6663	6666	3	7.5	57.7	68.8	0.07	0.6	133.8	2665.8	40	21.888	129.2	y	21.89
12	6636	6639	3	7.9	82.8	54.8	0.11	0.6	133.5	2655	40	33.297	129.1	y	33.30
13	6360	6364	4	8.4	101.1	46.5	0.18	0.6	130.5	2544.8	40	54.027	128.5	n	0.00
14	5998	6005	7	9	84	47.9	0.33	0.6	126.5	2400.6	40	94.034	127.8	y	94.03
15	5310	5314	4	9.3	88.7	45.4	0.2	0.6	118.8	2124.8	40	52.295	126.3	n	0.00
Totals or Averages	5310	8189	89	8.2	138.6	43.5	4.12	0.60	141.6	2948.3	40.0	1377.779	130.7		1271.457


AFFIDAVIT OF MAILING:

Re: Application for Commingle
Wild Horse Bench 6-26E
Section 26-10S-19E
Uintah County, UT

I, the undersigned, Carla Christian, do hereby declare that on February 14, 2006, I posted a true copy of the above-referenced application in U.S. mail, in a sealed envelope addressed to the following:

Contiguous Gas Lease Owners:

EOG Resources, Inc.
600 Seventeenth Street
Suite 1100N
Denver, Colorado 80202


Carla Christian, Sr. Regulatory Specialist

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
WELL COMPLETION OR RECOMPLETION REPORT AND LOG

CONFIDENTIAL

FORM APPROVED
OMB NO. 1004-0137

Expires: November 30, 2000

5. Lease Serial No.

UTU-43156

1a. Type of Well ☐ Oil Well ☒ Gas Well ☐ Dry ☐ Other ☐
b. Type of Completion: ☒ New Well ☐ Work Over ☐ Deepen ☐ Diff. Resvr.
Other _____

2. Name of Operator

Dominion Exploration & Production, Inc.

3. Address

14000 Quail Springs Parkway - Ste. 600 - Okla. City, OK 73134

3a. Phone No. (include area code)

405-749-1300

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface

1730' FNL & 2055' FWL, SENW

At top prod. Interval reported below

At total depth

14. Date Spudded
8/13/200515. Date T.D. Reached
11/29/2005

16. Date Completed

☐ D&A☒ Ready to prod.

12/18/2005

18. Total Depth: MD 8302'
TVD19. Plug Back T.D.: MD 8206'
TVD20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)

Platform Express Laterolog/Tool Combination Print

Gamma Ray, Cement Bond Log

22. Was well cored? ☒ No ☐ Yes (Submit analysis)Was DST run? ☒ No ☐ Yes (Submit report)Directional Survey? ☒ No ☐ Yes (Submit copy)

23. Casing and Liner Record (Report all string set in well)

Hole Size	Size/Grade	Wt. (#/ft)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12 1/4"	8 5/8"	32#	Surface	2,210'		675 Sx		Circ.	
7 7/8"	5 1/2"	17#	Surface	8,259'		663 Sx		Est. TOC @ 2550'	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Mesaverde	8074'	8189'	8074- 90, 8121- 24, 8186- 89		69	Open
B) Mesaverde	7894'	8013'	(7894- 04, 7906- 08, 7912- 18 7994- 04, 8010- 13)		67	Open
C) Uteland Buttes	7438'	7462'	7438- 42, 7457- 62		56	Open
D) Uteland Buttes	6636'	6751'	6636- 39, 6663- 66, 6739- 51		57	Open
E) Chapita Wells	5996'	6005'	5996- 05		55	Open
F)						
G)						

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
8074' - 8189'	Frac w/68,291 20/40 PR 6000 sd. w/431.8 mscf of N2 and 899 bbls of YF120ST.
7894' - 8013'	Frac w/81,994# 20/40 Ottawa sd. w/291.2 mscf of N2 and 663 bbls of YF120ST.
7438' - 7462'	Frac w/39,919# 20/40 Ottawa sd. w/184 mscf of N2 and 541 bbls of YF120ST.
6636' - 6751'	Frac w/56,548# 20/40 Ottawa sd. w/200.9 mscf of N2 and 580 bbls of YF120ST.
5996' - 6005'	Frac w/22,232# 20/40 Ottawa sd. w/134.3 mscf of N2 and 282 bbls of YF115ST.

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
12/18/2005	2/11/2006	24	→	3	1028	7			Flowing
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
20		529	→	3	1028	7	1,342,667		Producing

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						

See instructions and spaces for additional data on reverse side)

28b. Production - Interval C									
Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
			→						

28c. Production - Interval D									
Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
			→						

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

Sold

30. Summary of Porous Zones (Include Aquifers):				31. Formation (Log) Markers	
Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.					
Formation	Top	Bottom	Description, Contents, etc.	Name	Top Meas. Depth
				Wasatch Tongue	3983'
				Uteland Limestone	4346'
				Wasatach	4502'
				Chapita Wells	5326'
				Uteland Buttes	6390'
				Mesaverde	7472'

32. Additional remarks (include plugging procedure)

33. Circle enclosed attachments:

- ☒ 1. Electrical/Mechanical Logs (1 full set req'd)
 2. Geologic Report
 3. DST Report
 4. Directional Survey
 5. Sundry Notice for plugging and cement verification
 6. Core Analysis
 7. Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Carla Christian Title Sr. Regulatory Specialist
 Signature Carla Christian Date February 27, 2006

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

X - Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

7/1/2007

FROM: (Old Operator): N1095-Dominion Exploration & Production, Inc 14000 Quail Springs Parkway, Suite 600 Oklahoma City, OK 73134 Phone: 1 (405) 749-1300	TO: (New Operator): N2615-XTO Energy Inc 810 Houston St Fort Worth, TX 76102 Phone: 1 (817) 870-2800
--	--

CA No.

Unit:

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LIST								

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 8/6/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 8/6/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 8/6/2007
- a. Is the new operator registered in the State of Utah: _____ Business Number: 5655506-0143
- b. If **NO**, the operator was contacted on: _____
- a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- b. Inspections of LA PA state/fee well sites complete on: n/a
- c. Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: _____
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: _____
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 9/27/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 9/27/2007
- Bond information entered in RBDMS on: 9/27/2007
- Fee/State wells attached to bond in RBDMS on: 9/27/2007
- Injection Projects to new operator in RBDMS on: 9/27/2007
- Receipt of Acceptance of Drilling Procedures for APD/New on: 9/27/2007

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: UTB000138
- Indian well(s) covered by Bond Number: n/a
- a. (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 104312762
- b. The **FORMER** operator has requested a release of liability from their bond on: 1/23/2008

The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER:
2. NAME OF OPERATOR: XTO Energy Inc. <i>N2615</i>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 810 Houston Street CITY Fort Worth STATE TX ZIP 76102		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: SEE ATTACHED		8. WELL NAME and NUMBER: SEE ATTACHED
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		9. API NUMBER: SEE ATTACHED
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Natural Buttes
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective July 1, 2007, XTO Energy Inc. has purchased the wells listed on the attachment from:

Dominion Exploration & Production, Inc.
14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134

N1095

James D. Abercrombie
James D. Abercrombie
Sr. Vice President, General Manager - Western Business Unit
(405) 749-1300

Please be advised that XTO Energy Inc. is considered to be the operator on the attached list and is responsible under the terms and conditions of the lease for the operations conducted upon the lease lands. Bond coverage is provided by Nationwide BLM Bond #104312750 and Department of Natural Resources Bond #104312762.

NAME (PLEASE PRINT) <u>Edwin S. Ryan, Jr.</u>	TITLE <u>Sr. Vice President - Land Administration</u>
SIGNATURE <i>Edwin S. Ryan, Jr.</i>	DATE <u>7/31/2007</u>

(This space for State use only)

APPROVED 9127107

Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

(See Instructions on Reverse Side)

RECEIVED

AUG 06 2007

DIV. OF OIL, GAS & MINING

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

api	well_name	qtr_qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4301530633	SKYLINE U 1-6	NENE	06	160S	060E	UTU-77263	99999	Federal	GW	DRL
4304731138	RBU 11-34B	NESW	34	090S	190E	U-017713	7058	Federal	GW	P
4304731179	BARTON FED 1-26	NWSE	26	100S	190E	U-43156	8005	Federal	GW	P
4304731724	RBU 11-35B	NESW	35	090S	190E	U-017713	11502	Federal	GW	S
4304731818	WILLOW CREEK UNIT 2	SESW	05	110S	200E	U-39223	11604	Federal	GW	TA
4304731878	EVANS FED 3-25	NENW	25	100S	190E	U-43156	11106	Federal	GW	P
4304731879	EVANS FED 41-26	NENE	26	100S	190E	U-43156	11034	Federal	GW	P
4304731881	APACHE 12-25	NWSW	25	100S	190E	UTU-3405	11080	Indian	GW	P
4304731897	END OF THE RAINBOW 21-1	SWSE	21	110S	240E	U-54224	11223	Federal	GW	S
4304731922	APACHE FED 44-25	SESE	25	100S	190E	U-3405	11185	Federal	GW	S
4304732094	RBU 13-35B	SWSW	35	090S	190E	U-017713	7058	Federal	GW	S
4304732222	RBU 15-35B	SWSE	35	090S	190E	U-017713	11365	Federal	GW	S
4304732237	FEDERAL 13-26B	SWSW	26	090S	190E	UTU-68625	11370	Federal	GW	S
4304732394	EVANS FED 12-25A	SWNW	25	100S	190E	U-43156	11451	Federal	GW	P
4304732395	EVANS FED 32-26	SWNE	26	100S	190E	U-43156	11447	Federal	GW	P
4304732515	WHB 1-25E	NENE	25	100S	190E	U-73011	11720	Federal	GW	P
4304732557	FEDERAL 12-11	SWNW	11	120S	240E	UTU-66425	11761	Federal	GW	S
4304732558	FEDERAL 34-30	SWSE	30	110S	230E	UTU-66410	11747	Federal	GW	S
4304732559	FEDERAL 22-22	SENW	22	110S	230E	UTU-66409	11746	Federal	GW	P
4304732560	FEDERAL 21-27	NENW	27	100S	240E	UTU-66422	11762	Federal	GW	P
4304732600	RBU 1-21EO	NENE	21	100S	190E	U-013766	11783	Federal	OW	S
4304732681	LANDING STRIP FEDERAL 44-10	SESE	10	120S	240E	UTU-69430	11853	Federal	GW	S
4304733019	BLACK DRAGON UNIT 31-34	NWNE	34	100S	240E	UTU-66422	12280	Federal	GW	P
4304733242	FEDERAL K 23-22	NESW	22	110S	210E	UTU-75098	13107	Federal	GW	P
4304733299	FED K 12-22	SWNW	22	110S	210E	UTU-75098	13133	Federal	GW	P
4304733508	EVANS FED 15-26E	SWSE	26	100S	190E	U-3405	12767	Federal	GW	P
4304733509	EVANS FED 9-26E	NESE	26	100S	190E	UTU-3405	12749	Federal	GW	P
4304733510	EVANS FED 10-25E	NWSE	25	100S	190E	U-3405	12927	Federal	GW	P
4304733511	EVANS FED 14-25E	SESW	25	100S	190E	U-3405	12793	Federal	GW	P
4304734000	RBU 1-18E	NENE	18	100S	190E	UTU-3576	14549	Federal	GW	P
4304734669	EVANS FED 4-25E	NENE	26	100S	190E	U-43156	13588	Federal	GW	P
4304734887	EVANS FED 2-26E	NWNE	26	100S	190E	U-43156	13830	Federal	GW	P
4304734908	EVANS FED 15-25E	NWSE	25	100S	190E	U-3405	14023	Federal	GW	P
4304734909	WH FED 11-26E	NESW	26	100S	190E	UTU-3405	14629	Federal	GW	P
4304734984	WHB 4-26E	NWNW	26	100S	190E	U-43156	14898	Federal	GW	P
4304734985	WHB 6-26E	SENW	26	100S	190E	U-43156	14886	Federal	GW	P
4304735034	EVANS FED 8-26E	SENE	26	100S	190E	U-43156	14145	Federal	GW	P
4304735035	WHB 12-26E	NWSW	26	100S	190E	UTU-3405	14899	Federal	GW	P
4304735036	EVANS FED 11-25E	NESW	25	100S	190E	UTU-3405	14134	Federal	GW	P
4304735037	EVANS FED 13-25E	SWSW	25	100S	190E	UTU-3405	14090	Federal	GW	P
4304735043	EVANS FED 16-26E	SESE	26	100S	190E	UTU-3405	14372	Federal	GW	P
4304735063	EVANS FED 8-25E	SENE	25	100S	190E	U-43156	14089	Federal	GW	P
4304735064	EVANS FED 6-25E	SENW	25	100S	190E	U-43156	14135	Federal	GW	P
4304735065	EVANS FED 9-25E	NESE	25	100S	190E	UTU-3405	13983	Federal	GW	P
4304735102	EVANS FED 2-25E	NWNE	25	100S	190E	U-43156	13956	Federal	GW	P
4304737451	WHB 13-26E	SWSW	26	100S	190E	UTU-3405	16058	Federal	GW	P
4304738869	LOVE 4-20G	NWNW	20	110S	210E	UTU-076040	16249	Federal	GW	DRL
4304739064	UTE TRIBAL 2-11H	NENW	11	110S	200E	14-20-H62-5611	16072	Indian	GW	DRL

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

api	well name	qtr	qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4304731777	STATE 4-36E	NWNW	36	100S	190E	ML-42175	11186	State	GW	P	
4304731784	STATE 12-36E	NWSW	36	100S	190E	ML-42175	99998	State	GW	LA	
4304732019	STATE 11-36E	NESW	36	100S	190E	ML-42175	11232	State	GW	P	
4304732224	STATE 5-36B	SWNW	36	090S	190E	ML-45173	11363	State	GW	PA	
4304732249	STATE 9-36B	NESE	36	090S	190E	ML-45173	11372	State	GW	PA	
4304732316	RBU 12-2F	NWSW	02	100S	200E	ML-10716	99998	State	GW	LA	
4304732404	STATE 2-36E	NWNE	36	100S	190E	ML-42175	99998	State	GW	LA	
4304732405	STATE 9-36E	NESE	36	100S	190E	ML-42175	99998	State	GW	LA	
4304732845	H R STATE S 22-2	SENE	02	120S	230E	ML-42215		State	GW	LA	
4304732870	H R STATE S 24-2	SESE	02	120S	230E	ML-42215		State	GW	LA	
4304732940	H R STATE S 42-2	SENE	02	120S	230E	ML-42215	13175	State	D	PA	
4304732979	STATE 2-36E	NWNE	36	100S	190E	ML-42175	12390	State	GW	P	
4304733129	STATE G 22-32	SENE	32	100S	230E	ML-47063		State	GW	LA	
4304733130	H R STATE S 44-2	SESE	02	120S	230E	ML-42215		State	GW	LA	
4304733169	STATE M 42-2	SENE	02	110S	230E	ML-47078		State	GW	LA	
4304733173	STATE M 23-2	NESW	02	110S	230E	ML-47078		State	GW	LA	
4304733174	STATE M 44-2	SESE	02	110S	230E	ML-47078		State	GW	LA	
4304733175	STATE N 31-16	NWNE	16	110S	240E	ML-47080		State	GW	LA	
4304733176	STATE Q 44-16	SESE	16	120S	210E	ML-47085	13134	State	D	PA	
4304733181	STATE 1-36E	NENE	36	100S	190E	ML-42175	12539	State	GW	P	
4304733738	STATE 1-2D	NENE	02	100S	180E	ML-26968		State	GW	LA	
4304733740	STATE 9-2D	NESE	02	100S	180E	ML-13215-A		State	GW	LA	
4304733837	STATE 7-36E	SWNE	36	100S	190E	ML-42175	13186	State	GW	P	
4304734012	CLIFFS 15-21L	SWSE	21	110S	250E	FEE		Fee	GW	LA	
4304734123	STATE 15-36E	SWSE	36	100S	190E	ML-42175	13784	State	GW	P	
4304734124	STATE 9-36E	NESE	36	100S	190E	ML-42175	13760	State	GW	P	
4304734241	STATE 5-36E	SWNW	36	100S	190E	ML-42175	13753	State	GW	P	
4304734284	STATE 13-36E	SWSW	36	100S	190E	ML-42175	13785	State	GW	P	
4304734285	STATE 6-36E	SENE	36	100S	190E	ML-42175	13370	State	GW	P	
4304735089	WHB 8-36E	SENE	36	100S	190E	ML-42175	14024	State	GW	P	
4304735612	WHB 14-36E	SESE	36	100S	190E	ML-42175	14759	State	GW	P	
4304736292	WHB 12-36E	NWSW	36	100S	190E	ML-42175	15116	State	GW	P	
4304736666	KINGS CANYON 1-32E	NENE	32	100S	190E	ML-47058	14958	State	GW	P	
4304736667	KINGS CANYON 10-36D	NWSE	36	100S	180E	ML-047058	14959	State	GW	P	
4304737034	AP 15-2J	SWSE	02	110S	190E	ML-36213	15778	State	GW	P	
4304737035	AP 10-2J	NWSE	02	110S	190E	ML-36213	16029	State	GW	S	
4304737036	AP 9-2J	NESE	02	110S	190E	ML-36213	15881	State	GW	P	
4304737037	AP 8-2J	SENE	02	110S	190E	ML-36213	15821	State	GW	P	
4304737038	AP 5-2J	SWNW	02	110S	190E	ML-36213	16043	State	D	PA	
4304737039	AP 3-2J	NENW	02	110S	190E	ML-36213	15910	State	GW	P	
4304737040	AP 2-2J	NWNE	02	110S	190E	ML-36213	99999	State	GW	DRL	
4304737041	AP 1-2J	NENE	02	110S	190E	ML-36213	15882	State	GW	P	
4304737659	KC 8-32E	SENE	32	100S	190E	ML-047059	15842	State	GW	P	
4304737660	KC 9-36D	SESE	36	100S	180E	ML-047058	99999	State	GW	DRL	
4304738261	KINGS CYN 2-32E	NWNE	32	100S	190E	ML-047059	15857	State	GW	DRL	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-43156
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: XTO ENERGY INC		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 382 Road 3100 , Aztec, NM, 87410		8. WELL NAME and NUMBER: WHB 6-26E
PHONE NUMBER: 505 333-3159 Ext		9. API NUMBER: 43047349850000
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1730 FNL 2055 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENW Section: 26 Township: 10.0S Range: 19.0E Meridian: S		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
		COUNTY: UINTAH
		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input checked="" type="checkbox"/> ACIDIZE	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 8/26/2009	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> ALTER CASING	
	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> OTHER	
	<input type="checkbox"/> CASING REPAIR	
	<input type="checkbox"/> CHANGE WELL NAME	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> APD EXTENSION	
	OTHER: _____	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. XTO Energy Inc., performed an acid treatment on this well per the following: 8/26/2009 MIRU Heat Waves Hot Oil Service. SN @ 8189'. BD tbg. Flshd tbg w/ 40 bbl 2% KCl. Pmpd 500 gal 7.5% ac dwn tbg. Let soak 1 hr. Flshd tbg w/ 40 bbl 2% KCl. RDMO Heat Waves Hot Oil Service.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY November 10, 2009		
NAME (PLEASE PRINT) Dolena Johnson	PHONE NUMBER 505 333-3164	TITLE Regulatory Compliance Tech
SIGNATURE N/A	DATE 11/10/2009	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-43156
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: WHB 6-26E	
2. NAME OF OPERATOR: XTO ENERGY INC	9. API NUMBER: 43047349850000	
3. ADDRESS OF OPERATOR: PO Box 6501 , Englewood, CO, 80155	PHONE NUMBER: 303 397-3727 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1730 FNL 2055 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENW Section: 26 Township: 10.0S Range: 19.0E Meridian: S		COUNTY: UINTAH
		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input checked="" type="checkbox"/> ACIDIZE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 1/7/2015	<input type="checkbox"/> ALTER CASING
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS
	<input type="checkbox"/> CHANGE TUBING
	<input type="checkbox"/> CHANGE WELL STATUS
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS
	<input type="checkbox"/> CONVERT WELL TYPE
	<input type="checkbox"/> DEEPEN
	<input type="checkbox"/> FRACTURE TREAT
	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE
	<input type="checkbox"/> PLUG AND ABANDON
	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME
	<input type="checkbox"/> RECLAMATION OF WELL SITE
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF
	<input type="checkbox"/> SI TA STATUS EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION
	<input type="checkbox"/> OTHER
	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

XTO Energy Inc. has performed an acid treatment on this well per the attached summary report.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
 February 13, 2015

NAME (PLEASE PRINT) Barbara Nicol	PHONE NUMBER 303-397-3736	TITLE Regulatory Analyst
SIGNATURE N/A	DATE 2/5/2015	

Wild Horse Bench 06-26E

12/12/2014: MIRU SLU. RIH w/ fish tls. POH. Rec plngr. Could not latch BHBS. RDMO SLU. SWI & SD for acid job.

12/15/2014: MIRU acid pmp trk. NU lines csg vlv. Tstd hd lines, Tstd gd. Pmp 500 gal 15% HCL acid dwn csg. Pmp 59 bbl TFW flush dwn csg. NU lines to tbg vlv. Tstd hd lines, Tstd gd. Pmp 250 gal 15% HCL acid dwn tbg. Pmp 21 bbls TFW flush dwn tbg, tbg filled & pressured up to 700 psig, could not pump through SN. SITP 0 psig. SICP 0 psig. SWIFPBU. RDMO pmp trk.

12/16/2014: MIRU SWU. PU & RIH w/swb tls. Swab 3 runs (2 hrs). Swb cups full of sc every run. SWI & SDFN.

12/17/2014: PU & RIH w/swb tls. Swab 4 runs (3 hrs). Swb cups full of sc every run. SWIFPBU. RDMO SWU

1/2/2015: MIRU SWU. PU & RIH w/swb tls. Swab, 3 runs (2 hrs). SWI & SDFWE.

1/5/2015: PU & RIH w/swb tls. Swab. 3 runs (2 hrs). SWI & SDFPBU. RDMO SWU.

1/6/2015: MIRU SWU. PU & RIH w/swb tls. Swab 8 runs (7 hrs). SWI & SDFN.

1/7/2015: PU & RIH w/swb tls. Swab 2 runs (2 hrs). Well KO flwg. Dropd plngr. SWIFPBU. RDMO SWU.

=====Wild Horse Bench 06-26E=====